

AC Current Probe Model MN261



The Model MN261 is the latest in compact AC current probes. It is designed to meet the most stringent demands in industry and electrical contracting. Model MN261 meets EN 61010, 600V, Cat. III safety standards and is CE Marked and UL approved in Canada and United States.

The Model MN261 has a 0.78" (20mm) jaw opening and accommodate conductors up to 250MCM. The unique hooked jaw design facilitates clamping and hooking onto conductors. Polycarbonate materials and ultrasonic welding are used throughout to ensure ruggedness and overall lasting reliability.

The Model MN261 uses tape-wound cores to further improve its high and low end performance. Rated at 200Arms it has a measurement range to 240Arms.

Features

- Small, compact size
- Measurement range of 0.1 to 24A, 0.5 to 240Aac
- Large jaw opening accommodates conductors up to 250MCM
- Designed for DMMs, loggers, recorders and oscilloscopes
- 40Hz to 10kHz response
- 100mVAC/AAC – 10mVAC/AAC output signals
- Designed to EN 61010, 600V Cat. III safety standard
- UL approved for Canada and United States
- Double Insulation
- CE Mark


Applications

- Measuring in breaker panels
- Industrial loads
- HVAC
- Residential and commercial sites
- Data logging/recording

Specifications

MODEL	MN261
ELECTRICAL	
Nominal Range	20A & 200A
Measurement Range	0.1 to 24A, 0.5 to 240A
Transformation Ratio	Voltage output
Output Signal	20A: 100mV/A, 200A: 10mV/A
Accuracy (20A Range)	1% of Reading $\pm$ 50mV
Phase Shift (20A Range)	Not Specified
Overload (20A Range)	24A for 10 min ON, 30 min OFF
Accuracy (200A Range)	
0.5 to 10A	3.5% of Reading $\pm$ 5mV
10 to 40A	3.0% of Reading $\pm$ 5mV
40 to 100A	2.5% of Reading $\pm$ 5mV
100 to 240A	1.5% of Reading $\pm$ 5mV
Phase Shift (200A Range)	
0.5 to 10A	Not Specified
10 to 40A	$\leq 6.0^\circ$
40 to 100A	$\leq 4.0^\circ$
100 to 240A	$\leq 3.0^\circ$
Overload (200A Range)	240A for 10 min ON, 30 min OFF
Frequency Range	40 to 10kHz
Limit Operating Conditions	200A permanently to 1kHz; Derating above 3kHz: 200A x (1/0.333F), F in kHz
Crest Factor	3 @ 200Arms with an error (due to CF) of 4%
Working/Common Mode Voltage	600Vrms
Output Termination	6 ft BNC
MECHANICAL	
Operating Temperature	14° to 131°F (-10° to 55°C)
Storage Temperature	-40° to 158°F (-40° to 70°C)
Operating Relative Humidity	10 to 35°C 85% RH (without roll-off above 35°C)
Jaw Opening	0.83" (21mm)
Maximum Conductor Size	0.78" (20mm)
Dimensions	5.47 x 2.00 x 1.18" (139 x 51 x 30mm)
Weight	6.5 oz (180g)
Polycarbonate Material	Polycarbonate with fiberglass charge, UL94 V0
SAFETY	
Electrical	EN 61010-2-32
UL Approval	Yes – Canada and United States
Double Insulation ☐	Yes
CE Mark	Yes

Note: Reference conditions: 20 to 26°C, 20 to 75% RH, external magnetic field <40A/m, 48 to 65Hz sine wave, distortion factor less than 1%, no DC component, no external current carrying conductor, test sample centered. Load impedance > 1 Ω

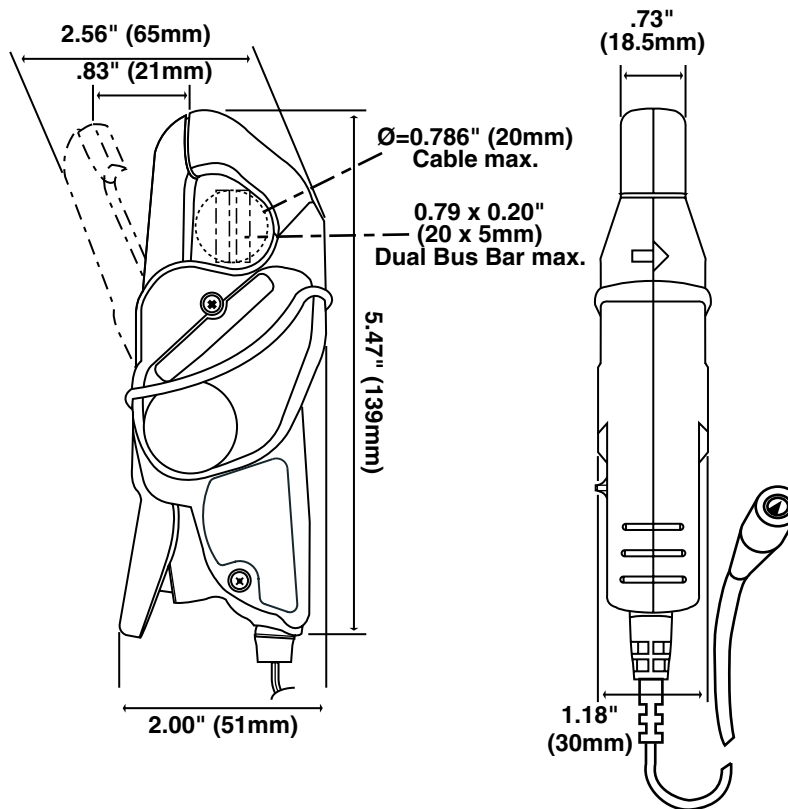

Lead with BNC:
 Insulated 6.5 ft
 (2m) coaxial cable
 with insulated BNC
 connector rated
 600Vrms

ORDERING INFORMATION

CATALOG NO.

AC Current Probe Model MN261 (BNC – 100mA/A – 24A; 10mV/A – 240A max) **Cat. #2115.82**

Includes a user manual

Accessories (Optional)

Banana (Female) – BNC (Male) Adaptor Cat. #2118.46

Contact Us

United States & Canada:

Chauvin Arnoux[®], Inc.
d.b.a. AEMC[®] Instruments
200 Foxborough Blvd.
Foxborough, MA 02035 USA
(508) 698-2115 • Fax (508) 698-2118
www.aemc.com

Customer Support – for placing an order, obtaining price & delivery:
customerservice@aemc.com

Sales Department – for general sales information:
sales@aemc.com

Repair and Calibration Service – for information on repair & calibration, obtaining a user manual:
repair@aemc.com

Technical and Product Application Support – for technical and application support:
techinfo@aemc.com

Webmaster – for information regarding www.aemc.com:
webmaster@aemc.com

South America, Central America, Mexico, Caribbean, Australia & New Zealand:

Chauvin Arnoux[®], Inc.
d.b.a. AEMC[®] Instruments
15 Faraday Drive
Dover, NH 03820 USA
(978) 526-7667 • Fax (978) 526-7605
export@aemc.com
www.aemc.com

All other countries:

Chauvin Arnoux[®] SCA
190, rue Championnet
75876 Paris Cedex 18, France
33 1 44 85 45 28 • Fax 33 1 46 27 73 89
info@chauvin-arnoux.com
www.chauvin-arnoux.com