



WATLOW®

Powered by Possibility

ASPYRE®



ASPYRE®

To Elevate Your System


with an intelligent power
controller family that simplifies
your application while offering
cutting-edge features



Modular and Smart Design

Easy to Use and Service


- > Easy to read real character pixel display
- > Quick access to SCRs minimizes production downtime
- > Simple to configure with ASPYRE® configuration PC software and plug and play access via USB device port
- > Intuitive application wizard automatically recommends controller configuration settings based on load type
- > Intelligent troubleshooting with built-in diagnostics
- > Easy to access replaceable semiconductor fuses

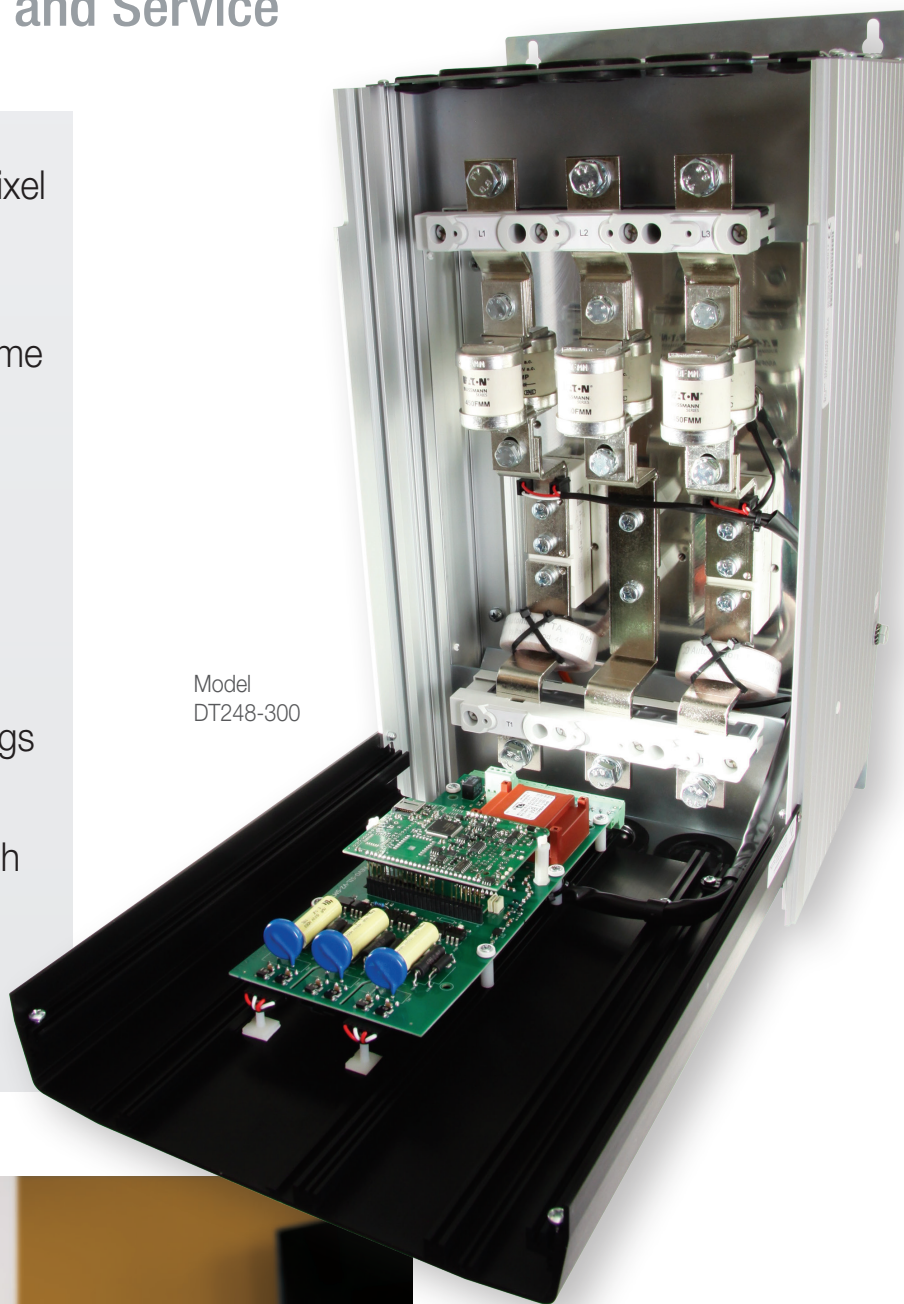

Model
DT148-060

Improved Process Control


For a Wide Variety of Load Types

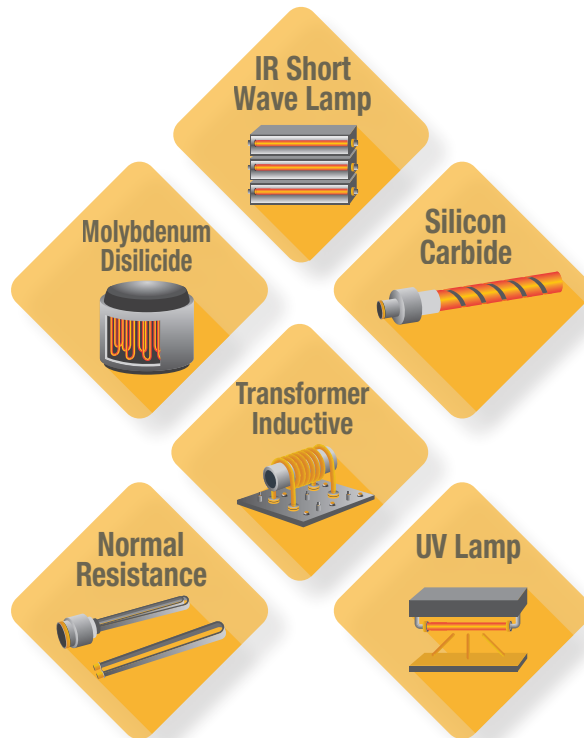


- > 20 firing combinations to align with a variety of load types
- > Advanced control modes protect heater from damage on start up and extends overall heater element life
- > Six available power control modes to maximize thermal performance
- > Multiple digital and analog I/O to increase system control functionality

Closed-Loop Temperature Control

Without Power Control Feedback

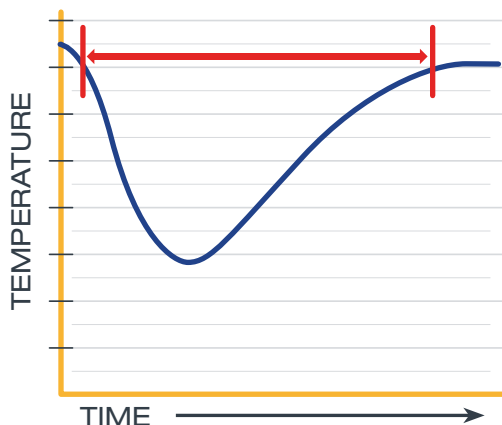

With **ASPYRE** Power Control Feedback

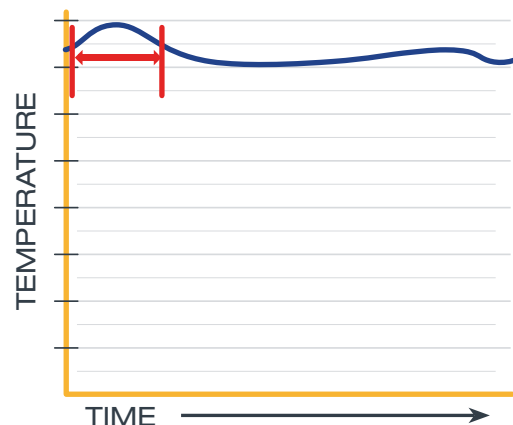

Power feedback can immediately adjust thermal performance to keep temperature constant



Integrated Functions

Lower Ownership Costs



Model
DT348-300

ASPYRE®

All the
functionality of
multiple devices...
*in a single
controller.*


- > UL® 508 rating results in reduced labor and project costs
- > Smaller footprint and less weight than legacy power controllers reduces cabinet space and shipping expenses
- > Integrated design reduces system complexity, inventory and labor to install and wire
- > ASPYRE DT features SCR switching, voltage sensor, data logging, Wi-Fi, current sensor, semiconductor fusing, user interface, communications, relay alarm, cooling fan, back-up power supply and more in one device



Communication Access to Important Data

Connectivity for Automation

- > USB device port (file transfers - configuration or data log)
- > Data logging
- > Wireless Wi-Fi and mobile application
- > Communication protocols
485 Modbus® RTU (up to 2),
Modbus® TCP, Ethernet IP,
Profibus DP, Profinet
- > 4-20mA retransmit

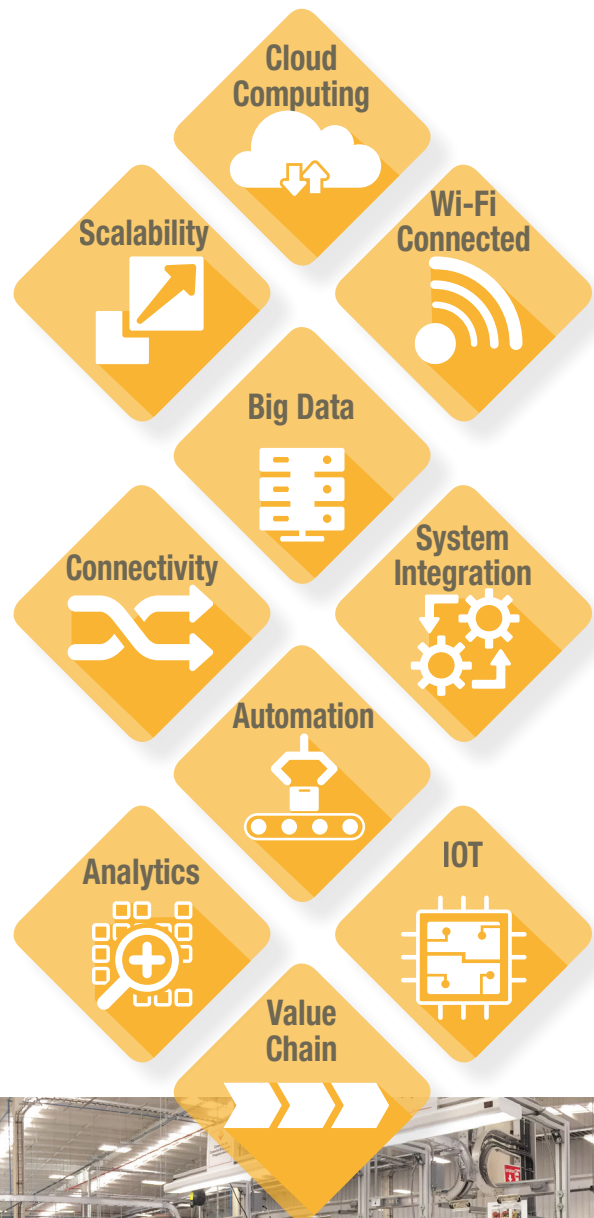




Industry-Leading Design

For High Quality and Reliability

High Performance Validated With Stringent Testing

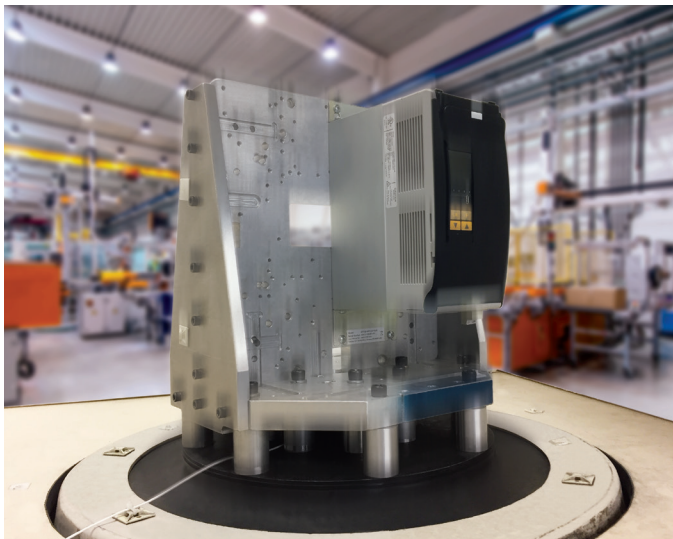

Shock and vibration testing



Model
DT248-035

- > 3 year factory warranty
- > Robust SCR design with high I²t rating
- > Passes rigorous Watlow test standards
- > Agency compliance - UL[®], CE, RoHS, W.E.E.E.
- > 100KA SCCR rating
- > UL[®] 508 rating
- > UL[®] 508 shortens project schedules, agency testing and expenses


Meets or Exceeds Industrial Test Standards

EN 61326	Electrical equipment for measurement, control, and laboratory use - EMC requirements
EN 61326-1	Electrical equipment for measurement, control, and laboratory use - EMC requirements Updated 61000-4-3 to 3 GHz, Updated 61000-4-11 dips test, required by Feb 1, 2009.
EN 61000-4-2	Electrostatic discharge immunity test.
EN 61000-4-3	Radiated radio-frequency electromagnetic fields.
EN 61000-4-4	Electrical fast transient/burst immunity test.
EN 61000-4-5	Surge immunity test.
EN 61000-4-6	Conducted disturbances induced by radio-frequency fields.
EN 61000-4-8	Power frequency magnetic field immunity test.
EN 61000-4-11	Voltage dips, short interruptions and voltage variations immunity test.
EN 55011	Limits and methods of measurement of radio disturbance characteristics of Industrial, Scientific, and medical (ISM) radio-frequency equipment.
EN 61000-3-2	Limits for harmonic current emissions (equipment ≤ 16 A per phase)
EN 61000-3-3	Limitation of voltage fluctuations and flicker in low-voltage supply systems with equipment with rated current ≤ 16 A.



Wet Heater Bake Out

Protects Heaters on Start-Up

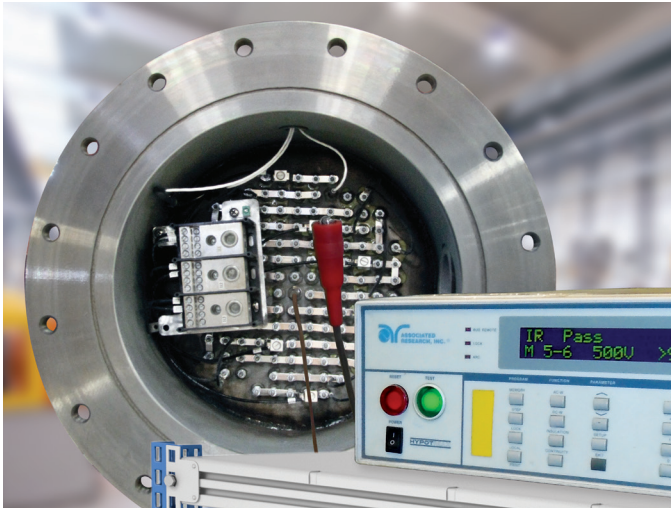

Megohm heater circuit precheck

Reduces start up costs
and production delays



Watlow process heater bundle

Megohm Test Procedure

WATLOW ELECTRIC MFG CO.

WATROD™ Circulation Heater Installation & Maintenance Manual

I&M NUMBER: 316-42-5-1



Page: 1

Rev: 5.00

1. Megohm precheck

During shipping and/or storage, the possibility of absorption by the insulation material within the element is possible. To ensure proper megohm values a minimum 500 VDC megohmmeter (Megger) should be used. Ensure that the megohm reading is greater than 10 megohms when the heater sheath is at room temperature.

If several heaters are connected, the megohm of the heater is obtained by dividing the reading by the number of connected elements. This reading should be greater than 10 megohms.

If a low megohm value exists, two alternative methods can be used to remedy the situation. The best method is to remove all terminal hardware including thermostat if provided, and bake out the heater at no higher than 250°F (120°C) overnight or until an acceptable reading is reached. The second method is to energize the unit at low voltage in air until the megohm is at an acceptable reading. Care should be taken to prevent the heater sheath





Find out more about Watlow and how we can provide thermal solutions for your company:

Phone: 1-800-WATLOW2 (1-800-928-5692)

E-mail: inquiry@watlow.com

Website: www.watlow.com

Powered by Possibility

Watlow Products and Technical Support Delivered Worldwide

North American Technical Support & Sales Offices

United States & Canada 1-800-WATLOW2
(1-800-928-5692)

Asian Technical Support & Sales Offices

China	+86 21 3532 8532
India	+91 40 6661 2700
Japan	+81 3 3518 6630
Korea	+82 2 2169 2600
Singapore	+65 6773 9488
Taiwan	+886 7 288 5168

European Technical Support & Sales Offices

France	+33 1 41 32 79 70
Germany	+49 7253 9400 0
Italy	+39 02 4588841
Spain	+34 91 675 1292
United Kingdom	+44 115 964 0777

Latin American Technical Support & Sales Office

Mexico	+52 442 256 2200
--------	------------------