

+ Datasheet EE211

**Humidity and Temperature Sensor
for Continuous High Humidity**



EE211

Humidity and Temperature Sensor for Continuous High Humidity

The EE211 is dedicated for accurate and long term stable measurement under continuous high humidity (>85 %RH) and condensing conditions in demanding climate control. It features a heated humidity (RH), and an interchangeable temperature (T) probe.

Reliability

Excellent performance of EE211 even in condensing polluted, aggressive environment is ensured by the combination of IP65/NEMA 4X enclosure, encapsulated electronics inside the humidity probe and a long-term stable E+E sensing element with E+E proprietary coating.

Versatility

All measured and calculated data is available on the RS485 interface via Modbus RTU whereas two of the values are available on the analogue voltage or current (3-wire) output. Up to three values can be shown simultaneously on the illuminated display.

Configurable and Adjustable

An optional USB configuration adapter and the free EE-PCS Product Configuration Software facilitate the configuration of the EE211 as well as the RH and T adjustment. The T probe can also be separately adjusted, the reference can be a high accuracy dry block calibrator.




EE211 with backlit display



EE211 without display

Features

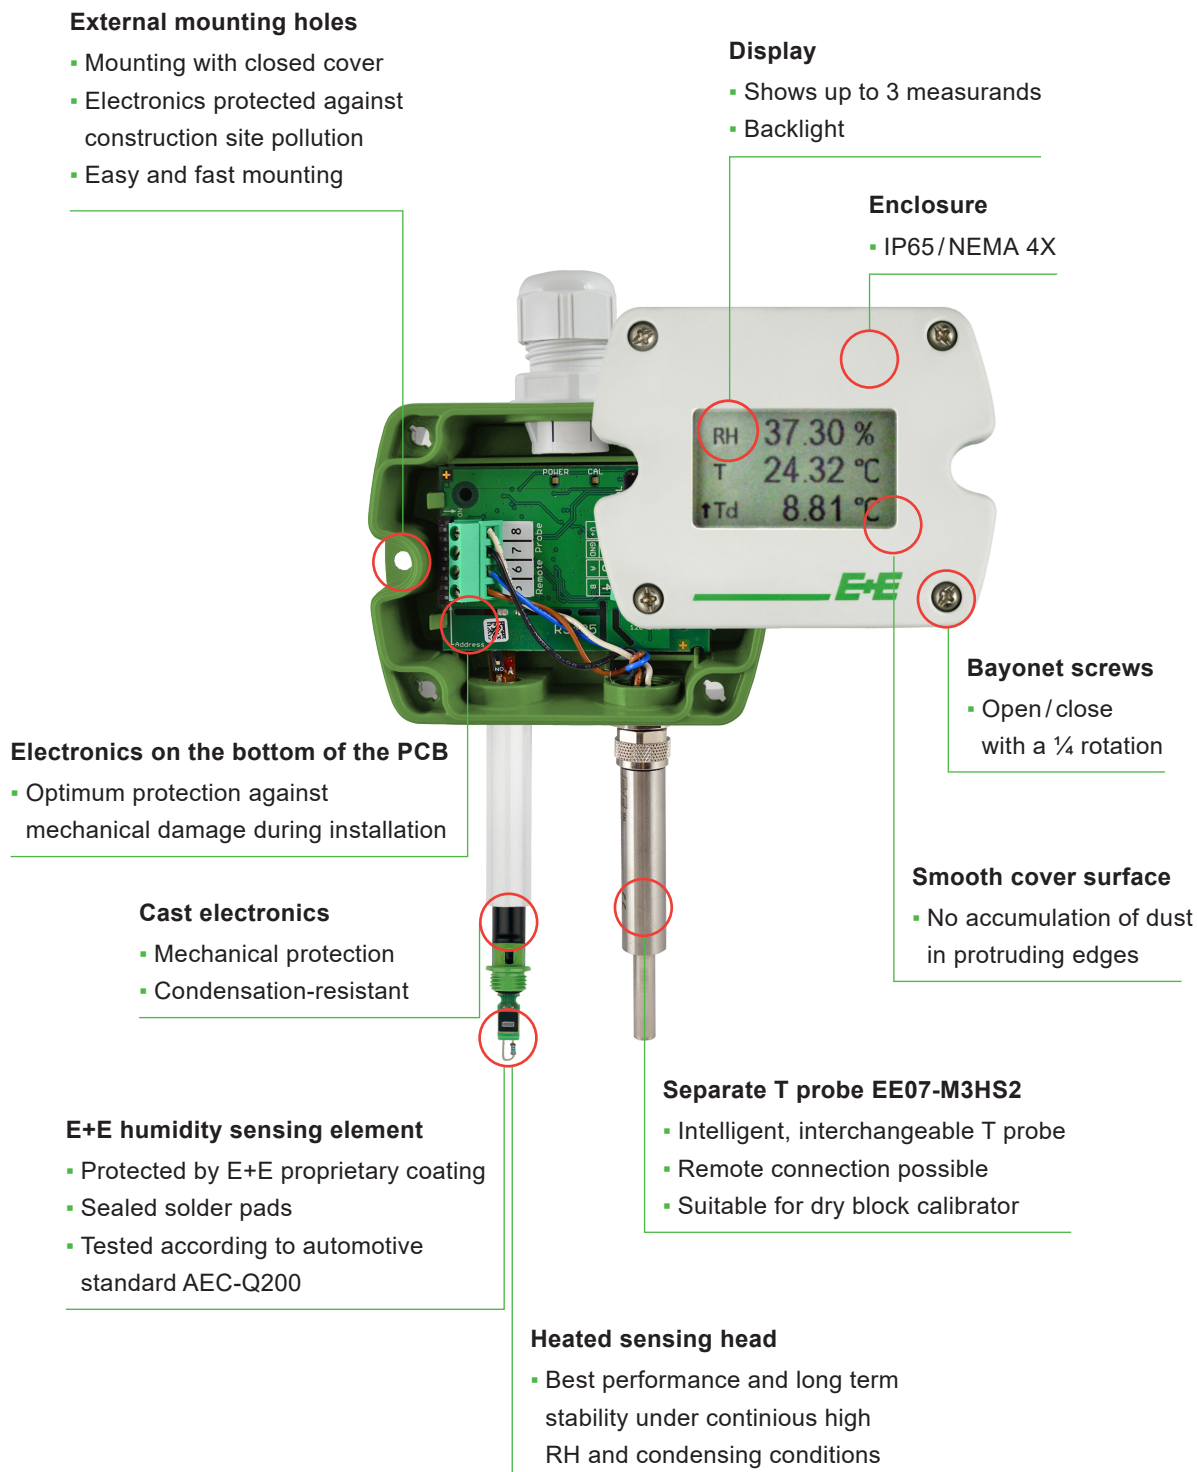


Test Report

According DIN EN 10204-3.1

Features

Protective Sensor Coating

The E+E proprietary sensor coating is a protective layer applied to the active surface of the sensing element. The coating substantially extends sensor lifetime and ensures optimal measurement performance in corrosive environment (salts, off-shore applications). Additionally, it improves the sensors' long term stability in dusty, dirty or oily applications by preventing stray impedance caused by deposits on the active sensor surface.

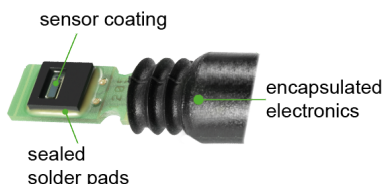

Operation Principle


The humidity probe is continuously heated for avoiding the effects of condensation and high humidity on the sensing elements, such as corrosion, high humidity drift or stray impedances. Thus, the probe heating leads to outstanding long term stability. Based on the measured RH and T values, the EE211 calculates the dew point temperature T_d whereas the separate, interchangeable T probe measures the ambient temperature. Ultimately, out of T_d and T, the device calculates the relative humidity RH as well as several other parameters like absolute humidity, mixing ratio, wet bulb temperature or enthalpy.

For details on the operation principle please refer to the EE211 user guide at www.epluse.com/ee211.


Dimensions

Values in mm (inch)

Basic device

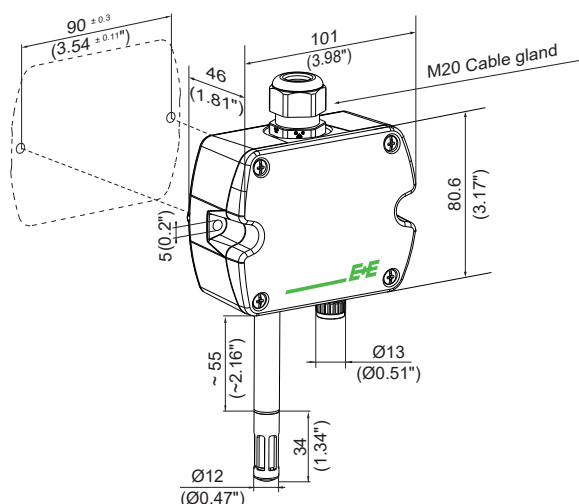

Temperature probe

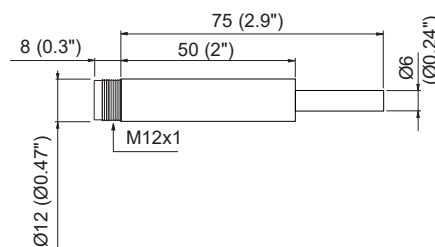

Technical Data


Measurands

Relative humidity (RH)

Measuring range	0...100 %RH		
Accuracy ¹⁾ incl. hysteresis, non-linearity and repeatability -5...+30 °C (23...86 °F)	$\pm(1,3 + 0,007 \cdot mv) \%RH$		mv = measured value

1) Traceable to international standards, administrated by NIST, PTB, BEV,...
The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation).
The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

Temperature (T)

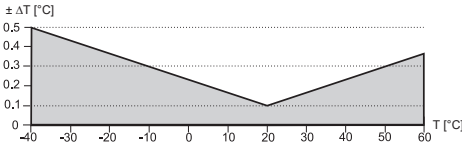Accuracy	
----------	--

Outputs

Analogue

RH + T (RH: 0...100 %; T: see ordering guide)	0 - 5 V / 0 - 10 V 0 - 20 mA / 4 - 20 mA (3-wire)	-1 < I _L < 1 mA R _L ≤ 500 Ω	I _L = load current R _L = load resistance
--	--	--	---

Digital

Digital interface	RS485 (EE211 = 1 unit load)
Protocol	Modbus RTU
Factory settings	9600 Baud, parity even, 1 stop bit, Modbus address 239
Supported Baud rates	9600, 19200, und 38400
Measured data types	FLOAT32 und INT16

Technical Data

General

Power supply class III  USA & Canada: Class 2 supply necessary, max. voltage 30 V DC	15 - 35 V DC or 24 V AC ±20 %				
Current consumption , at 24 V		DC		AC	
		Without display	With display	Without display	With display
	Voltage output	max. 13 mA	max. 19 mA	max. 38 mA _{rms}	max. 49 mA _{rms}
	Current output	max. 34 mA	max. 40 mA	typ. 75 mA _{rms}	typ. 85 mA _{rms}
	Digital interface	typ. 8 mA	typ. 17 mA	typ. 23 mA _{rms}	typ. 40 mA _{rms}
Electrical connection	Screw terminals max. 1.5 mm ²				
Cable gland	M20x1.5				
Display	1, 2 or 3 lines, user configurable, with backlight				
Temperature ranges		Without display		With display	
	Operation	-40...+60 °C (-40...+140 °F)		-20...+50 °C (-4...+122 °F)	
	Storage	-40...+60 °C (-40...+140 °F)		-20...+60 °C (-4...+140 °F)	
T probe	Material	Stainless steel 1.4571			
Enclosure	Material Protection rating	PC (Polycarbonate), UL94V-0 (with display UL94HB) approved IP65/NEMA 4X			
Electromagnetic compatibility	EN 61326-1 FCC Part15 Class B	EN 61326-2-3 ICES-003 Class B	Industrial environment		
Conformity	 				

Ordering Guide

Feature	Description	Code	
Hardware Configuration		EE211-	
	Model	M1	
	Analogue output	0 - 5 V	A2
		0 - 10 V	A3
		0 - 20 mA (3-wire)	A5
		4 - 20 mA (3-wire)	A6
	Digital interface ¹⁾	RS485	J3
Software Setup Outputs	Display ²⁾	Without display	No code
		Display with backlight	D2
	T probe	Metal EE07-M3HS2	AM7
	Output 1 measurand	Relative humidity RH [%]	No code
		Other measurands (xx see measurand code below)	MAxx
	Output 1 scaling low	0	No code
		Value	SALValue
	Output 1 scaling high	100	No code
		Value	SAHValue
	Output 2 measurand	Temperature T [°C]	No code
		Temperature T [°F]	MB2
		Other measurands (xx see measurand code below)	MBxx
	Output 2 scaling low	-40	No code
		Value	SBLValue
	Output 2 scaling high	60	No code
		Value	SBHValue
	Units	Metric (SI)	No code
		Non-metric (US/GB)	U2

1) Factory setting: Baud rate 9600, parity even, 1 stop bit. Other factory settings available upon request. Baud rate choice: 9600 / 19200 / 38400.
Modbus Map and communication setting: See User Guide and Modbus Application Note at www.epluse.com/ee211.

2) Factory setting: For analogue output versions the display shows the measurands selected for output 1 and output 2. For digital output versions the display shows RH and T.

Measurand Code

For Output 1 and 2 in the Ordering Guide

Measurand	Unit	Code
		MAxx / MBxx
Dew point	Td	°C
		°F
Frost point	Tf	°C
		°F
Mixing ratio	r	g/kg
		gr/lb
Absolute humidity	dv	g/m³
		gr/ft³
Wet bulb temperature	Tw	°C
		°F
Water vapour partial pressure	e	mbar
		psi
Specific enthalpy	h	kJ/kg
		BTU/lb

Ordering Example

EE211-M1A6AM7MB60SBL100SBH300

Feature	Code	Description
Model	M1	RH + T
Analogue output	A6	4 - 20 mA
Display	No code	Without display
T probe	AM7	Metal EE07-M3HS2
Output 1 measurand	No code	Relative humidity RH (%)
Output 1 scaling low	No code	0
Output 1 scaling high	No code	100
Output 2 measurand	MB60	Mixing ratio r (g/kg)
Output 2 scaling low	SBL100	100
Output 2 scaling high	SBH300	300


EE211-M1J3D2AM7U2

Feature	Code	Description
Model	M1	RH + T
Digital interface	J3	RS485
Display	D2	Display with backlight
T probe	AM7	Metal EE07-M3HS2
Unit	U2	Non-metric (US/GB)

Accessories

For further information see datasheet [Accessories](#).

Accessories	Code
E+E Product Configuration Software (Free download: www.epluse.com/configurator)	EE-PCS
Power supply adapter	V03
Protection cap for 12 mm (0.47") probe	HA010783
USB configuration adapter	HA011066
Cable for T probe (M12x1 socket, M12x1 plug)	2 m (6.6 ft) HA010801 5 m (16.4 ft) HA010802 10 m (32.8 ft) HA010803

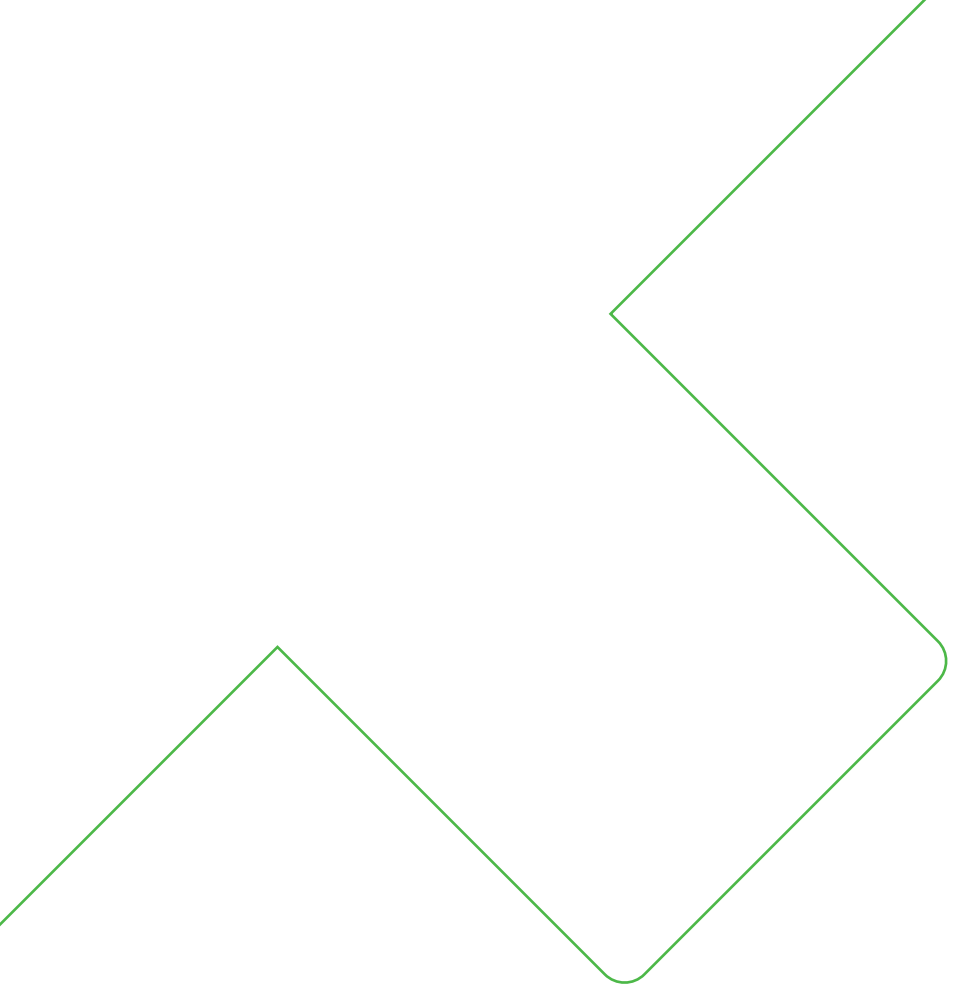

Company Headquarters &
Production Site

E+E Elektronik Ges.m.b.H.
Langwiesen 7
4209 Engerwitzdorf | Austria
T +43 7235 605-0
F +43 7235 605-8
info@epluse.com
www.epluse.com

Subsidiaries

E+E Sensor Technology (Shanghai) Co., Ltd.
T +86 21 6117 6129
info@epluse.cn

E+E Elektronik France SARL
T +33 4 74 72 35 82
info.fr@epluse.com

E+E Elektronik Deutschland GmbH
T +49 6171 69411-0
info.de@epluse.com

E+E Elektronik India Private Limited
T +91 990 440 5400
info.in@epluse.com

E+E Elektronik Italia S.R.L.
T +39 02 2707 86 36
info.it@epluse.com

E+E Korea Co., Ltd.
T +82 31 732 6050
info.kr@epluse.com

E+E Elektronik Corporation
T +1 847 490 0520
info.us@epluse.com



—
your partner
in sensor
technology.