

VARIO

Linux

THE NEW STANDARD IN EMISSION TESTING



since 1984®

EMISSION MONITORING SYSTEMS

Over 30 years of innovative gas analysis!

- Portable and Semi-Continuous Applications
- High precision gas analysis accuracy
- Intuitive touch screen and LINUX OS
- CTM 30, CTM 34 and ASTM D6522 compliance

PORTABLE EMISSION ANALYZER

MRU online View Software for trending and data export



For tuning, trouble-shooting, compliance reporting or long-term, semi-continuous monitoring of nearly any combustion/emission application

Linux operating system



- O₂, CO, CO₂, NO, NO₂, SO₂, H₂, H₂S, CO-high, & CO-very high,
 - Up to 6 electrochemical sensors,
 - plus CO₂ / CO / CH₄ (C₃H₈) NDIR is possible!
 - Low CO, NO, NO₂, SO₂ and ranges are available
- Emission calculations such as mass flow, calculated or True NO(x), plus O₂ referencing to user defined values
- Gas temperature measurement up to 2,012°F (use stainless steel up to 1,200°F, use Inconel tubes up to 2,012°F) (use ceramic up to 3,090°F)

Bright and large color touch screen



- Integrated Peltier cooler with automatic condensate drain pump
- Automatic zeroing using 3-way solenoid valve
- Internal sample flow monitoring
- Strong, regulated sample gas pump
- Fresh air inlet nozzle
- Differential pressure or stack gas pressure +/- 40 inH₂O (100 hPa)
- Combustion air temperature up to 930°F, using adequate NiCrNi probes
- 7" high contrast, color touchscreen with graphical data display
- Automatic data logging
- Automatic, internal diagnostics
- Direct csv or pdf reporting
- Data transfer over LAN Ethernet or USB
- 8 channel analog outputs and 4 channel analog inputs (4-20mA)
- Single universal input 0-10V, 4-20mA, t/c, or RS485
- Internal 10,000 data memory and external 4GB USB-stick
- Universal power supply handles up to 600W heated sample line
- Rugged aluminum enclosure with rubber molded impact protection

Nylon protection case with shoulder strap




Safe transport with the aluminum framed case



SMART GAS ANALYSIS

PROBES AND PROBE TUBES

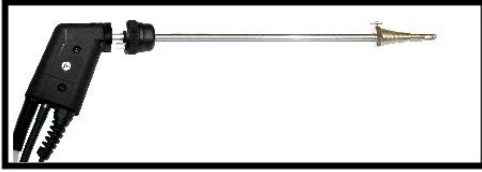

Low cost industrial probe for interchangeable probe tubes with 9' or 16' rugged, braided sheathed sampling line and Viton hose for clean combustions only



probe tubes (4" to 80" long)
in SS (1,200°F) or Inconel (2,000°F)
Also available with sintered metal filter



Industrial probe for interchangeable probe tubes with 9' or 16' sampling line and heated probe handle and easy replaceable quartz glass wool filter
Available with and without heated sampling line




High temp ceramic probe (3,000°F)
With temperature measurement
with easy replaceable
quartz glass wool filter



L-Type SS with or without K-Type t/c
in sizes from 4" (0.12Ø) to 79" (0.47 Ø)


PITOT TUBES

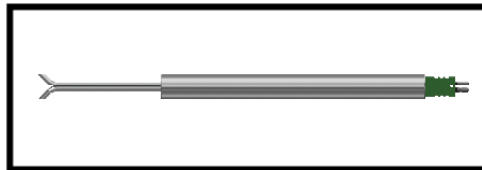

S-Type SS with K-Type t/c (59" lead) and 1.1"Ø
protection tube
available in 19" or 39" lengths (0.31"Ø)



- 1 Pressure-/diff. Pressure
- 2 Pressure-/diff. Pressure
- 3 Combustion air temperature
- 4 AUX-port
- 5 Probe electrical connector
- 6 Outlet fan of gas cooler
- 7 Sample gas inlet
- 8 Fresh air inlet port
- 9 Sample gas outlet port (VENT)
- 10 Condensate outlet port
- 11 Sample gas filter
- 12 Loudspeaker
- 13 Ethernet (LAN)
- 14 USB socket*
- 15 Second USB socket (option)
- 16 RS485 (option)
- 17 Analog outputs 4 ... 20 mA
- 18 Mains power supply



*) including USB stick in MRU design for data storage and transfer
optional USB to WLAN dongle for wireless data transfer
optional USB to Bluetooth dongle for wireless data to smartphone with MRU4u app
optional RS485 connector for long cable data transfer using Modbus RTU protocol

TECHNICAL SPECIFICATIONS

VARIO luxx	Portable analyzer with up to 6 electrochemical sensors and 3 gas NDIR bench
Fuel types	Natural gas, propane, butane, #2, #5, & #6 light oils, heavy oil, kerosene, distillate #1, diesel, coal, coal anthracite & bituminous, wood (dry, 10%, 20%, 30%, &40% M.), pellets, and four user defined fuel types

Measurement components	Method	Meas. range (0...min / max) *	Resolution	Accuracy **
O ₂ Oxygen (long-Life)	ECS	0 ... 25.00 %	0,01%	0,2%
O ₂ Oxygen	PM	0 ... 25.00 %	0,01%	0,1%
CO-low CO - low	ECS	0 ... 500 ppm	0.1 ppm	± 2 ppm or 5 % reading
CO Carbon monoxide H ₂ compensated	ECS	0 ... 10,000 / 20,000 ppm	1 ppm	± 10 ppm or 5 % reading
CO - high Carbon monoxide	ECS	0 ... 2.00 / 10.00 %	0,01%	± 0.01 % or 5 % reading
NO-low Nitric oxide	ECS	0 ... 300 ppm	0.1 ppm	± 2 ppm or 5 % reading
NO Nitric oxide	ECS	0 ... 1,000 / 5,000 ppm	1 ppm	± 5 ppm or 5 % reading
NO ₂ -low Nitrogen dioxide	ECS	0 ... 100 ppm	0.1 ppm	± 2 ppm or 5 % reading
NO ₂ Nitrogen dioxide	ECS	0 ... 200 / 1,000 ppm	1 ppm	± 5 ppm or 5 % reading
SO ₂ -low Sulfur dioxide	ECS	0 ... 100 ppm	0.1 ppm	± 2 ppm or 5 % reading
SO ₂ Sulfur dioxide	ECS	0 ... 1,000 / 5,000 ppm	1 ppm	± 10 ppm or 5 % reading
H ₂ S-low Hydrogen sulfide	ECS	0 ... 50 / 500 ppm	1 ppm	± 2 ppm or 5 % reading
H ₂ S Hydrogen sulfide	ECS	0 ... 2,000 / 5,000 ppm	1 ppm	± 5 ppm or 5 % reading
H ₂ Hydrogen	ECS	0 ... 1,000 / 2,000 ppm	1 ppm	± 5 ppm or 5 % reading

Measurement components	Method	Meas. range (0...min / max)	Resolution	Accuracy **
CO Carbon monoxide	NDIR	0 ... 3,000 / 30,000 ppm	1 ppm	± 15 ppm or 2 % reading
CO Carbon monoxide	NDIR	0 ... 1.00 / 10.00 %	0,01%	± 0.1 % or 2 % reading
CO ₂ Carbon dioxide	NDIR	0 ... 5.00 / 40.00 %	0.1 ppm	± 0.3 % or 2 % reading
HC Hydrocarbons (CH ₄)	NDIR	0 ... 3,000 / 10,000 ppm	1 ppm	± 20 ppm or 2 % reading
HC Hydrocarbons (C ₃ H ₈)	NDIR	0 ... 1,000 / 10,000 ppm	1 ppm	± 10 ppm or 2 % reading
HC Hydrocarbons (CH ₄)	NDIR	0 ... 1.00 / 4.00 %	0,01%	± 0.05 % or 2 % reading

* overload range of ECS is usable only for short duration

** which ever is larger

OTHER MEASUREMENTS AND CALCULATIONS	Method	Meas. range (0...min / max)	Resolution	Accuracy **
T-gas Flue gas temperature	NiCrNi	32 °F ... 2,192 °F (0 °C ... 1,200 °C)	2 °F (1 °C)	± 2°F or 2 % reading
T-air Combustion air temperature	NiCrNi	32 °F ... 932 °F (0 °C ... 500 °C)	2 °F (1 °C)	± 2°F or 2 % reading
T-amb Ambient air temperature	PT2000	32 °F ... 212 °F (0 °C ... 500 °C)	2 °F (1 °C)	± 2°F or 2 % reading
P-Press Differential pressure	Piezoresistiv	-48 ... +48 inH ₂ O (-120 ... +120 hPa)	1 Pa	± 2 Pa or 1 % reading
V-flow flow velocity measurement	Diff.pressure	3 ... 100 m/s	1 m/s	± 1 m/s or 1 % reading

AUX-connector	Software	for K-thermocouple, 0 ... 10 Vdc, 4 ... 20 mA, RS485
Combustion analysis	Software	Losses, excess air, Lambda, dew point
Emission calculations	Software	mg/Nm ³ , reference O ₂ , g/s, kg/h

GENERAL TECHNICAL DATA

Operating system	LINUX
Display, operation	7" TFT (800 x 480 px) color display, backlit, with touch and swipe operation
Data storage type	10,000 data sets internal and external USB-Stick
Interface to PC / Notebook	Ethernet, Bluetooth, WLAN, RS485
Data transfer over cable / wireless	RS485, RJ45 (Ethernet) / Bluetooth, WLAN
Analog output 4 ... 20 mA	8 channel, user free configurable
Analog input 4 ... 20 mA	4 channel, user free configurable
Universal analog input - AUX	0 ... 10 Vdc / 4 ... 20 mA / K-type / RS485
Mains free operation	Li-Ion, 48 Wh, for appr. 1 hr „stand-by“ (optional additional battery, 48 Wh Li-Ion)
Operating temperature	41°F ... 122°F; RH up to 95 % not condensing
Storage temperature	-4°F ... 122°F
Power supply	86 ... 265 Vac / 47 ... 63 Hz / 105 W (up to 600 W with heated sampling line)
Protection class	IP20 (or IP42 inside transport case)
Dimensions	(W x H x D) 16.92" x 11.41" x 5.9" (430 x 290 x 150 mm)
Weight	appr. 16.5lbs (7,5 kg), for minimal configuration

Data subject to change without notice

MRU Instruments, Inc.
Houston, Texas 77044
Tel.: (832) 230 - 0155
Fax: (832) 230 - 1553
info@mru-instruments.com
www.mru-instruments.com

Support and sales by:

