

260pcs Crimp blade and Receptacle connectors pair set with insulators-assortment

Item No.: 1809C019

Household appliances use crimp blade and receptacle connectors from 2.8mm to 6.3mm, which are widely available. This practical range consists of the most common blade connectors, soft insulating sleeves and hard plastic protecting boots - ideal for repair and maintenance. The compilation includes the cross sections from 0.5 mm² to 2.5 mm² for fine and superfine conductors. Connection angle 180 °. Material: electrolytic copper.




set contents

Section	Contents	pcs
1	Black PVC sleeve for 6.3mmtab	6
	Red PVC sleeve for 6.3mmtab	6
	Blue PVC sleeve for 6.3mmtab	6
	Transparent PVC sleeve for 6.3mmtab	6
2	Black PVC sleeve for 4.8mmtab	8
	Red PVC sleeve for 4.8mmtab	8
	Blue PVC sleeve for 4.8mmtab	8
	Transparent PVC sleeve for 4.8mmtab	8
3	Black PVC sleeve for 2.8mmtab	12
	Red PVC sleeve for 2.8mmtab	12
	Blue PVC sleeve for 2.8mmtab	12
	Transparent PVC sleeve for 2.8mmtab	12
4	PA housing for 6.3mmtab	6
5	PA housing for 4.8mmtab	8
6	PA housing for 2.8mmtab	12
7	Blade connector 6.3 x 0.8mm cross section 1.5-2.5mm ²	15
8	Blade connector 4.8 x 0.8mm cross section 1.5-2.5mm ²	20
9	Blade connector 2.8 x 0.8mm cross section 0.5-1.0mm ²	30
10	Blade receptacle connector 6.3 x 0.8mm cross section 1.5-2.5mm ²	15
11	Blade receptacle connector 4.8 x 0.8mm cross section 1.5-2.5mm ²	20
12	Blade receptacle connector 2.8 x 0.8mm cross section 0.5-1.0mm ²	30




Blade and Receptacle connector

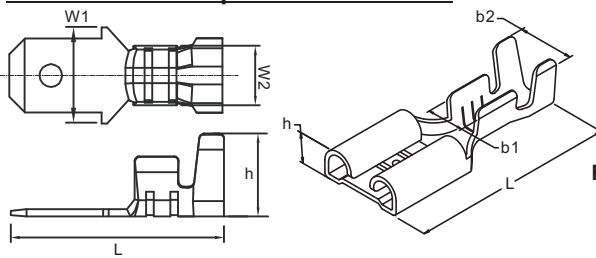


Tab (mm)	Cross section (mm ²)	L (mm)	h (mm)	W1 (mm)	W2 (mm)
2.8 x 0.8	0.5 - 1.0	16.0	4.7	2.8	2.9
4.8 x 0.8	1.5 - 2.5	17.0	4.7	4.8	3.5
6.3 x 0.8	1.5 - 2.5	20.0	4.5	6.3	3.8
Receptacle (mm)	Cross section (mm ²)	L (mm)	h (mm)	b1 (mm)	b2 (mm)
2.8 x 0.8	0.5 - 1.5	15.8	2.0	2.3	3.8
4.8 x 0.8	1.5 - 2.5	15.5	2.4	4.3	6.0
6.3 x 0.8	1.5 - 2.5	19.0	2.8	4.5	7.2

PVC insulating sleeve

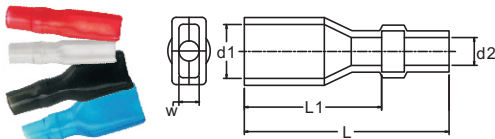

Receptacle (mm)	L (mm)	L1 (mm)	d1 (mm)	d2 (mm)	w (mm)
2.8 x 0.8	23.0 ± 2.0	15.5 ± 1.5	4.0	ø3.0	1.8
4.8 x 0.8	23.0 ± 2.0	15.5 ± 1.5	5.0	ø3.0	2.3
6.3 x 0.8	25.0 ± 2.0	18.0 ± 2.0	8.0	ø3.5	3.5

PA Plastic housing

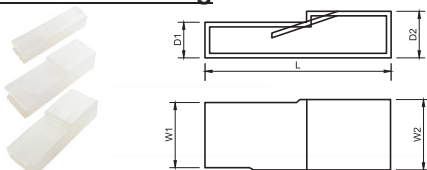

Receptacle (mm)	L (mm)	d1 (mm)	d2 (mm)	w1 (mm)	w2 (mm)
2.8 x 0.8	20.2 ± 0.2	4.0 ± 0.1	4.4 ± 0.1	5.0 ± 0.1	5.4 ± 0.1
4.8 x 0.8	21.5 ± 0.2	4.0 ± 0.1	5.8 ± 0.1	7.0 ± 0.1	7.0 ± 0.1
6.3 x 0.8	25.0 ± 0.2	4.8 ± 0.1	6.3 ± 0.1	9.0 ± 0.1	9.4 ± 0.1