

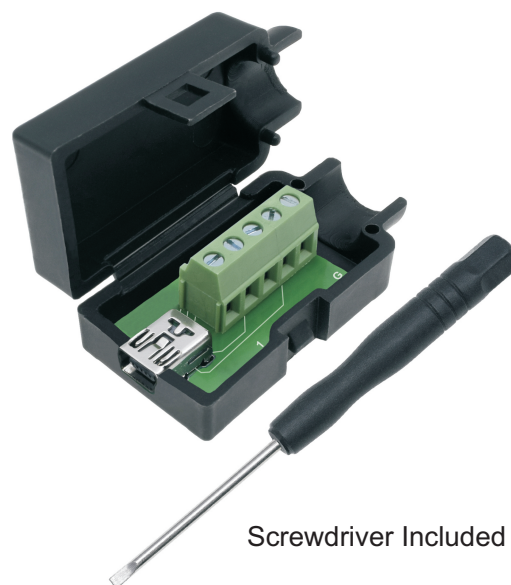
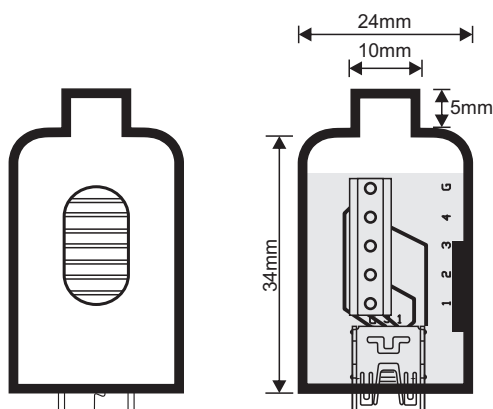


Mini USB 2.0 Female Connector modular

Item No. 2001C207



Screwdriver Included

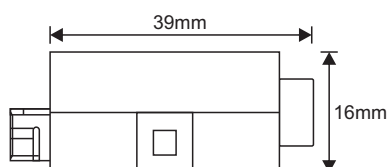

	1	2	3	4	5
	VBUS	D -	D +	ID	GND

Material:

Housing: PP

Insulator: PBT

Connector shell: SPCC with plated Ni 40μ min.

Contact: Brass with plated Au 1μ

Technical:

Voltage rating: 30V max.

Current rating: 1.0A max.

Contact resistance: 500mΩ max.

Insulation resistance: 100MΩ min.

Dielectric withstanding voltage: 100V/AC(R.M.S)

Operation temperature: -20 ~85°C

