

9-Pin D-sub terminal connector modular



2010C246 - Male connector with locking screw connection



2010C247 - Female connector with locking screw connection



2010C248 - Male connector with jackscrew nut connection



2010C249 - Female connector with jackscrew nut connection

Included accessories
1x Screw driver
1x Cable strain Relief
2x Fastening screw



Material:

Housing: PP

Connector insulator: PBT+30%GF (UL94V-0)

Contact: Brass

Contact plated: Nickel

Connector shell plated: Cu60μ/Ni100-120μ



Technical:

Contact current rating: 5A max.


Insulation resistance: 1000MΩ min. at 500V/DC

Dielectric withstanding voltage: 500V/AC(R.M.S)/1min.

Operation temperature: -20 ~85°C

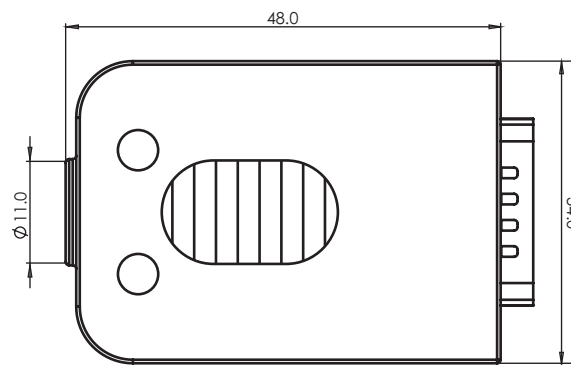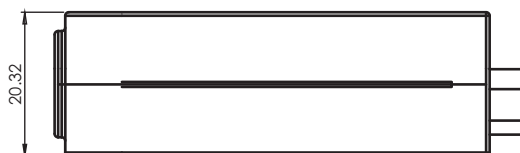

mm ±0.2

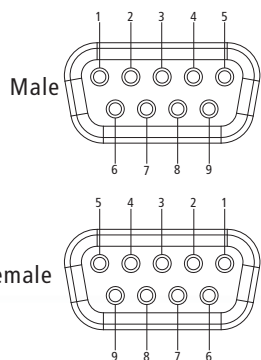

- 1 DCD (Data Carrier Detect)
- 2 RXD (Received Data)
- 3 TXD (Transmitted Data)
- 4 DTR (Data Terminal Ready)
- 5 GND (Signal Ground)
- 6 DSR (Data Send Ready)
- 7 RTS (Request to Send)
- 8 CTS (Clear to Send)
- 9 RI (Ring Indicator)