


2700pcs Cable-ferrules-assortment

Item No.: 201711C002

The assortment consists of uninsulated and insulated wire end ferrules in a practical transparent assortment box. The assortment includes various wire end ferrules from 0.5 mm² to 10 mm² for fine and finest wires. Simple insulation for splice-free cable entry. Temperature resistant up to 120 / 75 °C Galvanic tinned for protection against corrosion. Material: copper and plastic, surface finishing: tinned.

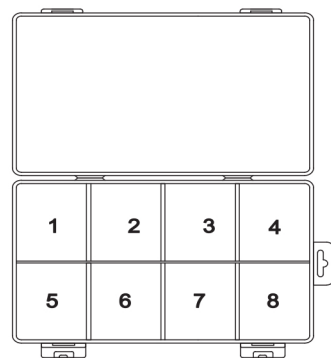

Section	Contents	pcs
1	Non-Insulated Cable Ferrules, 0.5mm ² x 8mm	500
	Non-Insulated Cable Ferrules, 0.75mm ² x 8mm	500
2	Non-Insulated Cable Ferrules, 1.0mm ² x 6mm	500
	Non-Insulated Cable Ferrules, 1.5mm ² x 8mm	500
3	Insulated Cable Ferrules, 0.5mm ² x 8mm	100
	Insulated Cable Ferrules, 0.75mm ² x 9mm	100
4	Insulated Cable Ferrules, 6.0mm ² x 12mm	50
5	Insulated Cable Ferrules, 1.0mm ² x 8mm	100
	Insulated Cable Ferrules, 1.5mm ² x 8mm	100
6	Insulated Cable Ferrules, 10mm ² x 12mm	50
7	Insulated Cable Ferrules, 4.0mm ² x 9mm	100
8	Insulated Cable Ferrules, 2.5mm ² x 8mm	100




Non-Insulated cable ferrules



Material: Tinned Copper
Operating Voltage: 600V max.
Operating Temperature: 120°C max.

Wire Range (mm ²)	L(mm)	D(ømm)	D1(ømm)	D2(ømm)
0.5	8.0	3.1	1.0	1.3
0.75	8.0	2.3	1.2	1.5
1.0	6.0	2.5	1.4	1.7
1.5	8.0	2.8	1.7	2.0

Insulated cable ferrules



Insulator Material: Vinyl
Terminal Material: Tinned Copper
Operating Voltage: 600V max.
Operating Temperature: 75°C max.

Wire Range (mm ²)	L(mm)	L1(mm)	L2(mm)	D(ømm)	D1(ømm)	D2(ømm)	code (DE)
0.5	14.0	6.0	8.0	2.6	1.0	1.3	Orange
0.75	14.0	6.0	8.0	2.8	1.2	1.5	White
1.0	14.0	6.0	8.0	3.0	1.4	1.7	Yellow
1.5	14.0	6.0	8.0	3.5	1.7	2.0	Red
2.5	14.0	6.0	8.0	4.2	2.2	2.6	Blue
4	18.0	9.0	9.0	4.8	2.8	3.2	Grey
6	20.0	8.0	12.0	6.3	3.5	3.9	Black
10	22.0	10.0	12.0	7.6	4.5	4.9	Ivory