

## 100pcs Adhesive lined Heat shrink tube-assortment, shrink ratio 3:1

Item No.: 201711CA003

This range is particularly suitable for hobbyists, craftsmen, field service, service workshops, electronics and the laboratory needs.


100 pieces of shrinking ration 3:1 standard shrinking tube for a range of application diameter from 1.6 to 12.7 mm.

Hot-melt adhesive lined tubing in the Black color.

The heat-shrink tubing can be used for insulation, protective covering of components, as anti-kink protection, protection against corrosion, as well as repair of cables and lines, and much more be used.



|                       |                      |
|-----------------------|----------------------|
| Shrinking ratio       | 3 : 1                |
| Material              | PE                   |
| Shrinking temperature | 70°C - 125°C         |
| Operation temperature | -40°C - 125°C        |
| Flammability          | VW-1                 |
| Tensile strength      | ≥ 10.4Mpa            |
| Elongation at break   | ≥ 300%               |
| Rated voltage         | 600V                 |
| Diselectric strength  | ≥ 1.5kv/mm at 30sec. |
| Volume resistivity    | ≥ 10 <sup>14</sup> Ω |

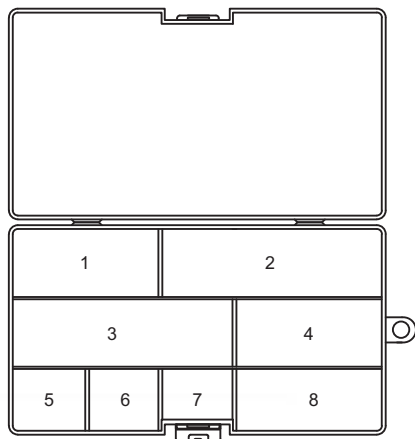

set contents

| Section | Heat shrink tube |                | Length | pcs |
|---------|------------------|----------------|--------|-----|
|         | Inner diameter ø | after shrink ø |        |     |
| 1       | 7.9 mm           | 2.7 mm         | 65 mm  | 5   |
| 2       | 12.7 mm          | 4.2 mm         | 95 mm  | 3   |
| 3       | 9.5 mm           | 3.2 mm         | 95 mm  | 4   |
| 4       | 6.4 mm           | 2.2 mm         | 65 mm  | 8   |
| 5       | 1.6 mm           | 0.5 mm         | 32 mm  | 25  |
| 6       | 2.4 mm           | 0.8 mm         | 32 mm  | 20  |
| 7       | 3.2 mm           | 1.0 mm         | 32 mm  | 20  |
| 8       | 4.8 mm           | 1.6 mm         | 65 mm  | 15  |