


Carbon Film Resistors Set 500 mW




Resistor color code

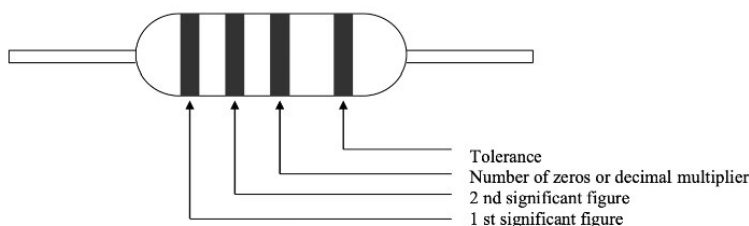

Color refer


Color	1 st Band	2 nd Band	3 rd Band	4 th Band
Black	0	0	10^0	
Brown	1	1	10^1	
Red	2	2	10^2	$\pm 2.0\%$
Orange	3	3	10^3	
Yellow	4	4	10^4	
Green	5	5	10^5	
Blue	6	6	10^6	
Violet	7	7	10^7	
Grey	8	8	10^8	
White	9	9	10^9	
Gold			10^{-1}	$\pm 5.0\%$
Silver			10^{-2}	$\pm 10.0\%$

Resistor dimensions

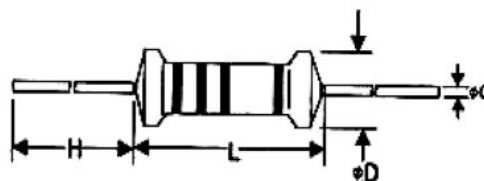

$L = 9.0 \pm 0.5 \text{ mm}$ / $D = 3.2 \pm 0.3 \text{ mm}$ / $H = 26 \pm 2 \text{ mm}$ / $d = 0.4 \text{ mm}$

Derating @ high temperature

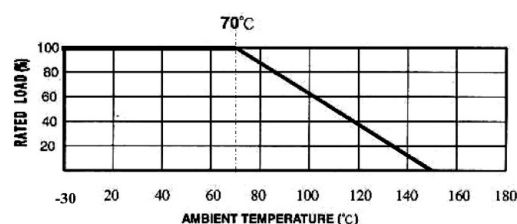

Technical data: Rated power: 0.5 W (Derating from $T_a=70^\circ\text{C}$) • Tolerance: 5% • Temp.-range: $-50 \dots 150^\circ\text{C}$ • Working voltage: 350 V • Dielectric withstanding/overload voltage: max. 700 V • Temp. Coefficient max $\pm 350 \text{ ppm}/^\circ\text{C}$ ($<100\text{k}\Omega$) / $0 \dots -700 \text{ ppm}/^\circ\text{C}$ ($100\text{k}\Omega \dots 1\text{M}\Omega$) • Solder ability: Dip the lead in to a solder bath having a Temperature of $260^\circ\text{C} \pm 5^\circ\text{C}$ up to $4 \pm 0.8\text{mm}$ from the body of the resistor and hold it for 5 ± 0.5 seconds then inspect.

Part No.	Resistor Value	Content
22P104	1, 10, 47, 100, 150, 220, 330, 470, 1k, 1.5k, 2.2k, 4.7k, 10k, 22k, 33k, 47k, 100k, 220k, 470k, 1M Ω	200 pcs. (10/each)
22P105	1, 10, 47, 100, 150, 220, 330, 470, 1k, 1.5k, 2.2k, 4.7k, 10k, 22k, 33k, 47k, 100k, 220k, 470k, 1M Ω	500 pcs. (25/each)
22P106	1, 10, 47, 100, 150, 220, 330, 470, 1k, 1.5k, 2.2k, 4.7k, 10k, 22k, 33k, 47k, 100k, 220k, 470k, 1M Ω	1000 pcs. (50/each)
22P107	1 Ω	100 pcs.
22P108	10 Ω	100 pcs.
22P109	47 Ω	100 pcs.
22P110	100 Ω	100 pcs.
22P111	150 Ω	100 pcs.
22P112	220 Ω	100 pcs.

Part No.	Resistor Value	Content
22P113	330 Ω	100 pcs.
22P114	470 Ω	100 pcs.
22P115	1 k Ω	100 pcs.
22P116	1.5 k Ω	100 pcs.
22P117	2.2 k Ω	100 pcs.
22P118	4.7 k Ω	100 pcs.
22P119	10 k Ω	100 pcs.
22P120	22 k Ω	100 pcs.
22P121	33 k Ω	100 pcs.
22P122	47 k Ω	100 pcs.
22P123	100 k Ω	100 pcs.
22P124	220 k Ω	100 pcs.
22P125	470 k Ω	100 pcs.
22P126	1 M Ω	100 pcs.