

HUMIDITY AND TEMPERATURE DATA LOGGERS



COMPACT, DEPENDABLE AND INEXPENSIVE.

- Measurement accuracy of $\pm 3.0\% \text{RH}$ and $\pm 0.3\text{ }^{\circ}\text{C}$
- Compact design with a high IP protection
- Large storage capacity: 32,000 data point memory
- MIN/MAX/AVG statistical function
- Includes HW4-lite programming and analysis software
- Clear LCD with visual alerts
- Appropriately long battery life (3 years at logging interval of 5 min.)
- Conforms to FDA 21 CFR Part 11 / GAMP 5





TECHNICAL INFORMATION

Dimensions / Ports

Type HL-1D



Type TL-1D

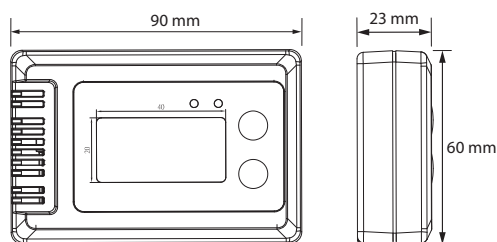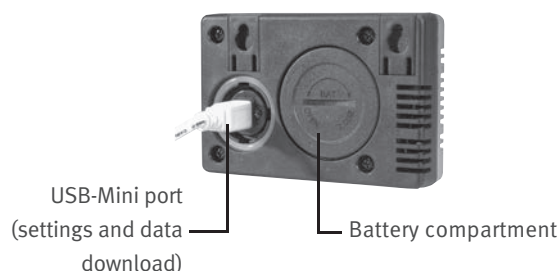

Data Logging



The values stored in the HL-1D or the TL-1D are available for download with the HW4 software. After downloading the saved data, a graphical display of the values is possible. Via the HW4

software, the logging interval, logging mode, alarms and other such functions can be setup or enabled.

General Specifications	
Parameters	HL-1D: Humidity and temperature TL-1D: Temperature
Temperature sensor	NTC
Humidity sensor	HL-1D: ROTRONIC HygroMer IN-1 TL-1D: --
Accuracy at 23 °C ±5 °C	HL-1D: ±3.0 %RH / ±0.3 °C TL-1D: ±0.3 °C
Range of application	-20...70 °C / 0...100 %RH
IP rating	IP67
Weight	85 g
Dimensions	90 x 60 x 23 mm
Logging interval	30 s...24 h
Battery	1 x CR2
Battery life	3 years at a logging interval of 5 minutes
Battery charge indicator	Yes (HW4 software, display and LED indicator)
Storage capacity	HL-1D: 16,000 data point memory (RH & T) TL-1D: 32,000 data point memory (T)
Function	MIN/MAX/AVG statistical data
Display	LCD, 2 lines, 1 decimal resolution
Display refresh rate	5 sec. (Standard) Same as Logging interval
LED indicator	2 LEDs Right LED flashes green during data logging Left LED flashes red when alarm limits breached or low battery
Communication	USB-Mini port
Adjustment	Humidity 1-point
FDA/GMP compatibility	Conforms to 21 CFR Part 11 and GAMP5
Software	HW4 V3.4.1 or later
Accessory	
USB-Mini cable	AC0003

Included	- CR2 Battery - Short instruction manual - Function and calibration certificate - HW4-lite software key code (software to be downloaded from www.rotronic.com)
-----------------	---

If you require any further information about these data loggers, please don't hesitate to contact us or visit our website www.rotronic.com, where you can find a complete, up to date overview of our data loggers and other products.

rotronic
MEASUREMENT SOLUTIONS

ROTRONIC AG, Grindelstrasse 6, CH - 8303 Bassersdorf, Tel. +41 44 838 11 11, Fax +41 44 838 14 83, www.rotronic.ch
 ROTRONIC Instruments (UK) Ltd, Crompton Fields, Crompton Way, Crawley, West Sussex, RH10 9EE, UK, Phone +44 (0)1293 571000, Fax +44 (0)1293 571008, www.rotronic.co.uk
 EROTRONIC Instrument Corp, 135 Engineers Road, Hauppauge, NY 11788, USA, Phone, +1 631 427-3898, Fax, +1 631 427-3902, www.rotronic-usa.com
 ROTRONIC Instruments Pte. Ltd., 1003 Bukit Merah Central, #06-31 Inno Centre, Singapore 159836, Phone +65 6376 2107, Fax +65 6376 4439, www.rotronic.sg