



DELTA i-system titanium white SCHUKO socket outlet 10/16 A 250 V With screwless Connection terminals with spring flap 55x 55 mm

| Model | |
|---|--|
| product brand name | DELTA |
| product designation | SCHUKO socket outlet |
| cover version | central plate |
| design of the special power supply unit | without special current supply |
| design of the socket according to VDE 0620 for severe conditions | No |
| design of the phase tap | No |
| General technical data | |
| marking of socket outlet | without imprint |
| mounting type | fixing with claw and screw |
| surface processing | others |
| material | thermoplastic |
| Supply voltage | |
| operating voltage rated value | 250 V |
| supply voltage frequency rated value | 50 Hz |
| Protection class | |
| protection class IP | IP20 |
| Main circuit | |
| operational current rated value | 16 A |
| Appearance | |
| color | titanium white |
| Product details | |
| product component | |
| <ul style="list-style-type: none"> • ejection equipment • labeling field • increased touch protection • residual current device • miniature fuse • integrated functional lighting • integrated light source • integrated orientation lighting • hinged lid | <ul style="list-style-type: none"> No No Yes No No No No No Yes |
| product feature | |
| <ul style="list-style-type: none"> • lockable • halogen-free • transparent | <ul style="list-style-type: none"> No Yes No |
| Product function | |
| product function | |
| <ul style="list-style-type: none"> • socket selectable | No |

| | |
|--|----------------|
| • overvoltage protection | No |
| Number | |
| number of units | 1 |
| number of sockets switchable | 0 |
| Connections | |
| arrangement of contacts diagonal | No |
| type of electrical connection | plug terminal |
| Mechanical Design | |
| height | 70 mm |
| width | 70 mm |
| depth | 45 mm |
| fastening method | flush mounting |
| material of the enclosure | plastic |
| Environmental footprint | |
| Environmental Product Declaration (EPD) | Yes |
| global warming potential [CO2 eq] total | 4.77 kg |
| global warming potential [CO2 eq] during manufacturing | 0.284 kg |
| global warming potential [CO2 eq] during operation | 4.48 kg |
| global warming potential [CO2 eq] after end of life | 7.42E-5 kg |
| Approvals Certificates | |
| General Product Approval | other |



[Confirmation](#)

[Miscellaneous](#)

Environment



[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5UB1917>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5UB1917>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5UB1917

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

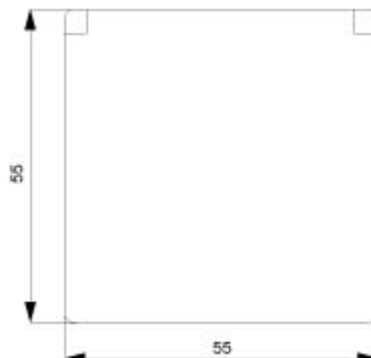

last modified:

4/4/2025 