

Tubular and Process Assemblies

FIREBAR Heating Elements

FINBAR


Composed of aluminized steel fins press fitted to a one inch single-ended FIREBAR element. The FINBAR is designed to improve heat transfer to the air and permits putting more power in tighter spaces—like forced air ducts, dryers, ovens and load bank resistors.

Heat transfer, lower sheath temperature and element life are all maximized by its finned construction.

Installation is simplified by terminations exiting at one end and mounting accommodations on both ends.

Performance Capabilities

- Watt densities to 50 W/in² (7.7 W/cm²)
- 304 stainless steel sheath temperatures to 1200°F (650°C)
- Voltages to 480V~(ac)
- Amperages to 48 amps per heater or 16 amps per coil

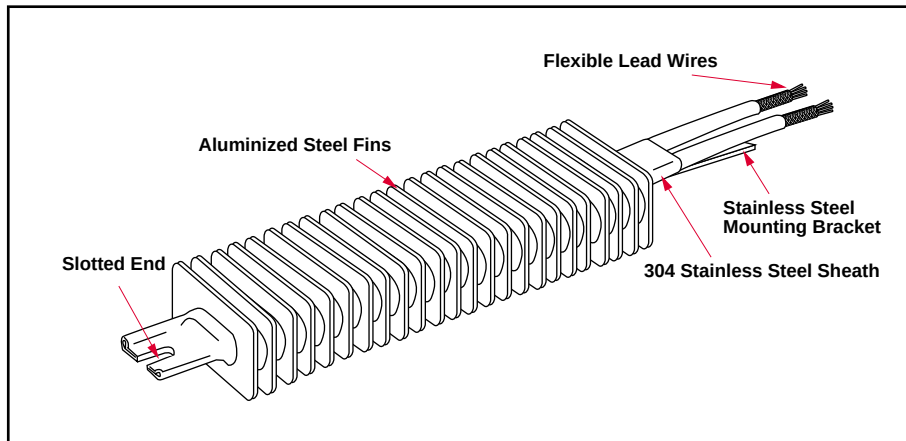

Features and Benefits

- **Rugged aluminized steel fins** effectively increase surface area to approximately 16 square inches for every linear inch of element length. Fins press fitted to the heating element improve heat transfer to the air.
- **Single-ended termination** simplifies wiring and installation.
- **Stainless steel mounting bracket**, welded to the terminal end, is supplied with a slotted end for ease of installation.

- **Lavacone seals** provide protection against humid storage conditions. Moisture retardant to 392°F (200°C).

Applications

- Forced air heating for dryers, ovens, ducts
- Still air heating for ovens, comfort heating
- Incubators
- Ink drying
- Load bank resistors

Construction Features

Construction features are detailed for assembly stock products only. Optional materials, sizes, terminations and ratings may be available at additional cost. For availability and ordering information on options, see [pages 307 to 312](#).

Watt Density: Stock; up to 40 W/in² (6.2 W/cm²), made-to-order; up to 50 W/in² (7.7 W/cm²)

Fin Surface Area: 16 in²/linear inch (40.5 cm²/linear cm)

Fin Cross Section: 2 X 1 inch (50 X 25 mm)

Maximum Operating Temperature: Sheath material: 304 Stainless Steel, 1200°F (650°C), Fin material; Aluminized Steel; 1100°F (600°C)

Heater Length: Stock; 10 to 48 inches (260 to 1210 mm), made-to-order; 6 to 120 inches (150 to 3050 mm)

No-Heat Length: 1 inch minimum, 12 inch maximum (25/305 mm)

Voltages: Up to 480V~(ac)

Phase: Stock; 1-phase parallel made-to-order; 1-phase parallel or 3-phase wye

Resistance Coils: Stock; 1 made-to-order 1 or 3

Terminations: Flexible lead wires, quick connect (spade), screw lug (plate) and threaded stud

Seal Material: Lavacone, rated to 392°F (200°C)

Optional Internal Thermocouple: made-to-order only; ASTM **Type K**

Single-End Configuration: Stock: slotted, made-to-order; slotted, no-slot or sealed

Agency Recognition: refer to FIREBAR UL file # E52951 and CSA file # 31388 under **Agency Recognition** on [pages 268 to 271](#).

Tubular and Process Assemblies

FIREBAR Heating Elements

Air Heating


The *Watt Density, Air Flow and Sheath Temperature* graph shows the relationship between watt density, air flow velocity and sheath temperature, along with a recommended temperature to avoid deteriorating the fins. Be aware that **lower sheath temperature yields longer heater life.**

The graphic representation is based on a single-ended FINBAR, various air velocities (at 68°F/20°C inlet temperature) and different watt densities.


To determine, from the graph, the operating temperature of the FINBAR's sheath, identify the air velocity curve that approximates

your application in feet per second (meters per second). Then look at the vertical line that most closely approximates the FINBAR's watt density. From the intersecting point, read over to the temperature column to determine the sheath's operating temperature.

Watt Density, Air Flow and Sheath Temperature (°F)

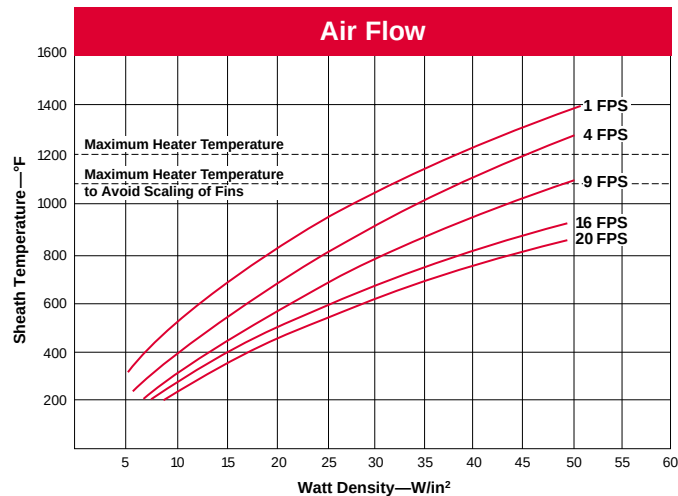

Watt Density, Air Flow and Sheath Temperature (°C)

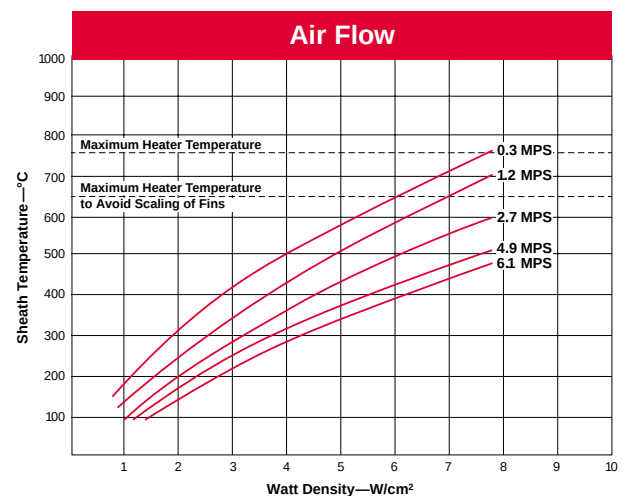


Application Hints

- Avoid deteriorating the fins by not exceeding the recommended maximum fin temperature of 1100°F (600°C).
- Ensure proper air flow to prevent premature heater failure.
- Locate the temperature sensor downstream from heater(s) for process temperature sensing.

The following mounting parameters are recommended:

- Air flow over element must be parallel with the flat side.
- Element center line to element center line spacing must be a minimum of 1½ inches (38 mm).



Proper air flow relative to the heater's sheath is parallel with the longer cross sectional axis.

Dual Ended FINBAR


FINBAR elements are typically terminated at one end. Upon request, however, dual ended

FINBAR heaters can be ordered. To order, specify **dual ended FINBAR** and lead length.

Tubular and Process Assemblies

FIREBAR Heating Elements

FINBAR

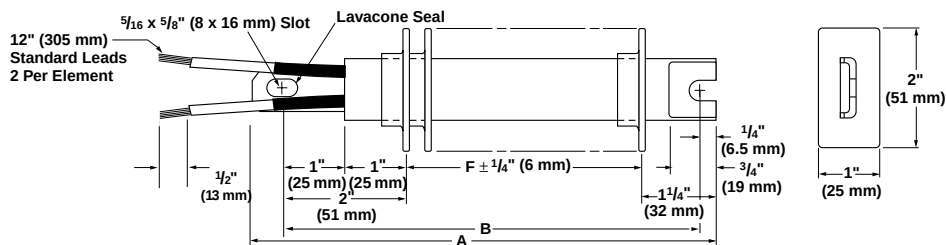

FINBAR Description	Overall A Dimension		Overall F Dimension		Mounting B Dimension		Watts	Code Number		Est.Net Weight
	Inch	(mm)	Inch	(mm)	Inch	(mm)		120V~(ac)	240V~(ac)	lbs (kg)

Application: Forced Air

20 W/in ² 304 SS (3.1 W/cm ²)	10%	(260)	6½	(158)	9½	(241)	300	FSP91WMF		1.4	(0.7)
	11%	(298)	8	(203)	11	(279)	375	FSP101WMF		1.4	(0.7)
	13%	(349)	10	(254)	13	(330)	450	FSP121WMF		1.5	(0.7)
	15	(381)	11¼	(285)	14¼	(362)	500	FSP141WMF		1.5	(0.7)
	17%	(447)	13%	(352)	16%	(428)	650	FSP161WMF	FSP1610WMF	1.6	(0.8)
	19%	(489)	15½	(393)	18½	(469)	725	FSP181WMF	FSP1810WMF	1.7	(0.8)
	20%	(527)	17	(431)	20	(508)	800	FSP191WMF	FSP1910WMF	1.7	(0.8)
	23½	(597)	19%	(501)	22%	(577)	900	FSP221WMF	FSP2210WMF	1.8	(0.9)
	25%	(641)	21½	(546)	24½	(622)	1000	FSP241WMF	FSP2410WMF	1.9	(0.9)
	26%	(673)	22%	(577)	25%	(654)	1050	FSP251WMF	FSP2510WMF	1.9	(0.9)
	30%	(765)	26%	(669)	29%	(746)	1250	FSP291WMF	FSP2910WMF	2.1	(1.0)
	33%	(841)	29%	(746)	32%	(822)	1350	FSP321WMF	FSP3210WMF	2.2	(1.0)
	35%	(905)	31%	(809)	34%	(885)	1500		FSP3410WMF	2.3	(1.1)
	38%	(975)	34%	(879)	37%	(955)	1600		FSP3710WMF	2.4	(1.1)
	42%	(1070)	38%	(974)	41%	(1050)	1800		FSP4110WMF	2.5	(1.2)
	47%	(1213)	44	(1117)	47	(1193)	2000		FSP4610WMF	2.7	(1.3)
40 W/in ² 304 SS (6.2 W/cm ²)	10%	(260)	6½	(158)	9½	(241)	600	FSP91WKF		1.4	(0.7)
	11%	(298)	8	(203)	11	(279)	750	FSP101WKF		1.4	(0.7)
	13%	(349)	10	(254)	13	(330)	900	FSP121WKF	FSP1210WKF	1.5	(0.7)
	15	(381)	11¼	(285)	14¼	(362)	1000	FSP131WKF	FSP1310WKF	1.5	(0.7)
	17%	(447)	13%	(352)	16%	(428)	1300	FSP161WKF	FSP1610WKF	1.6	(0.8)
	19%	(489)	15½	(393)	18½	(469)	1450	FSP181WKF	FSP1810WKF	1.7	(0.8)
	20%	(527)	17	(431)	20	(508)	1600		FSP1910WKF	1.7	(0.8)
	23½	(597)	19%	(501)	22%	(577)	1800		FSP2210WKF	1.8	(0.9)
	25%	(641)	21½	(546)	24½	(622)	2000		FSP2410WKF	1.9	(0.9)
	26%	(673)	22%	(577)	25%	(654)	2100		FSP2510WKF	1.9	(0.9)
	30%	(765)	26%	(669)	29%	(746)	2500		FSP2910WKF	2.1	(1.0)
	33%	(841)	29%	(746)	32%	(822)	2700		FSP3210WKF	2.2	(1.0)
	35%	(905)	31%	(809)	34%	(885)	3000		FSP3410WKF	2.3	(1.1)
	38%	(975)	34%	(879)	37%	(955)	3200		FSP3710WKF	2.4	(1.1)
	42%	(1070)	38%	(974)	41%	(1050)	3600		FSP4110WKF	2.5	(1.2)
	47%	(1213)	44	(1117)	47	(1193)	4000		FSP4610WKF	2.7	(1.3)

All stock units are Assembly stock.

Availability

Assembly Stock: Three working days

F.O.B.: Hannibal, Missouri

How to Order

To order a stock FINBAR heating element, specify:

- Watlow Code number
- Volts/watts
- Termination options
- Options
- Quantity

For **made-to-order** FINBAR heating elements, specify:

- Type of application, including air flow velocity, volume, etc.
- Single- or double-ended element
- Volts/watts
- Heated length
- No-heat length
- Terminal pin length or termination options, including moisture seal type
- Quantity

- Options, including thermocouple, sealed end, no mounting bracket, etc.

Availability

Assembly Stock: Three working days

Modified Stock®: Five to seven working days

Made-to-Order: Four to five weeks

Options, complexity and quantity may affect availability and lead times. Consult factory.

① Assembly Stock units with catalog options.