

2052R/2062R
Wire Tracer Receiver
2000T
Wire Tracer Transmitter


 www.fluke.com




2000T

1



GFI X

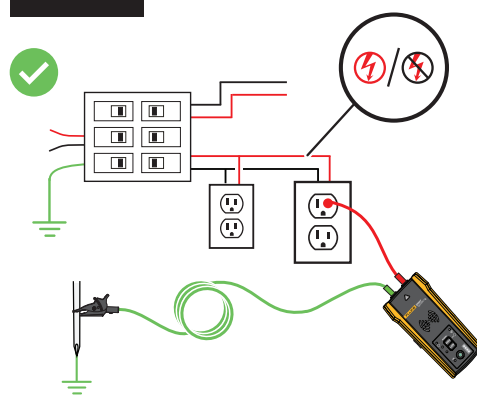


GFI

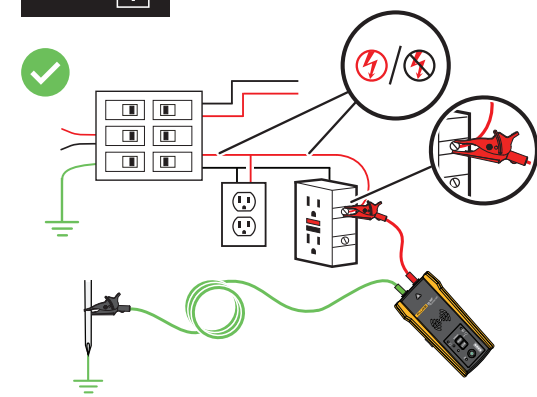



GFI

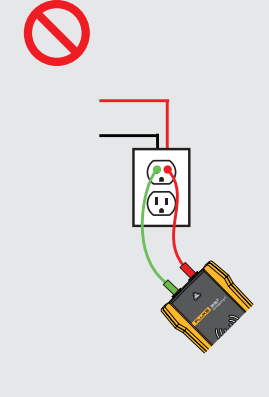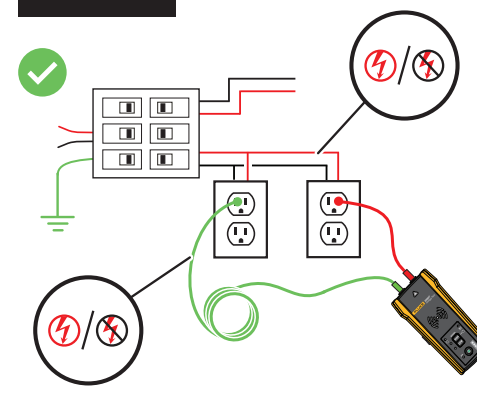


RCD X

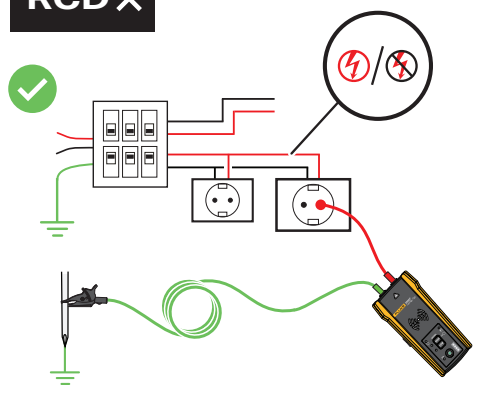

RCD

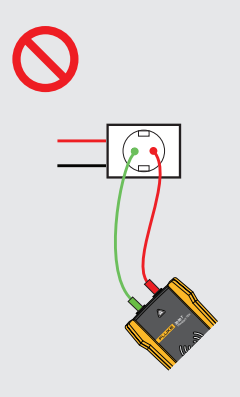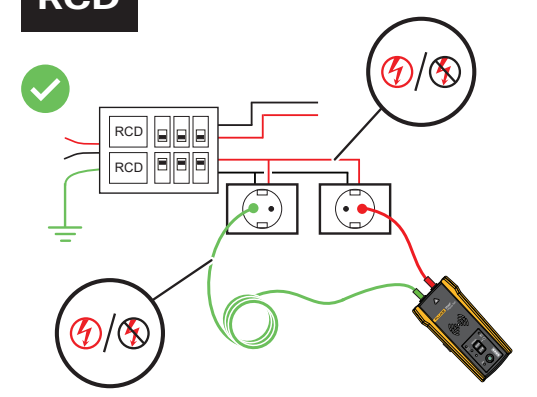


2

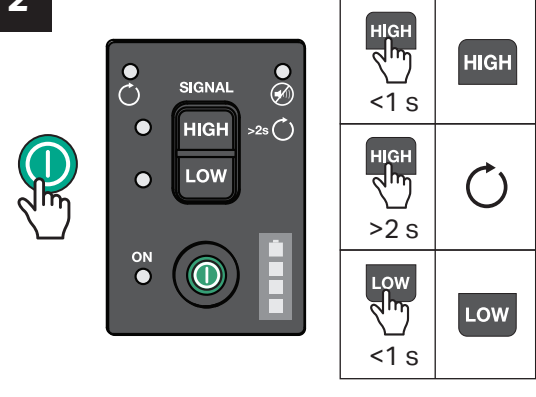


SIGNAL	TIME	RESULT
HIGH	<1 s	HIGH
HIGH	>2 s	REPEAT
LOW	<1 s	LOW

2052R

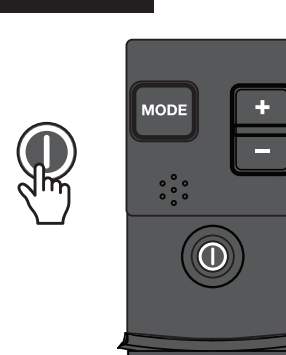

MODE	TIME	RESULT
0X	>>	
1X	REPEAT	
2X	REPEAT	
3X	NCV	


2062R

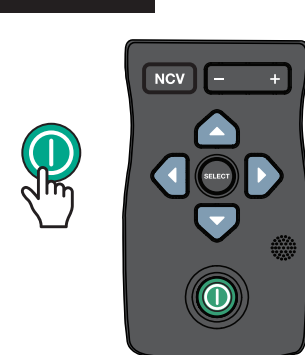


MODE	TIME	RESULT
1X	>	SMART SENSOR
2X	>	TIP SENSOR
NCV		BREAKER
		NON-CONTACT VOLTAGE

MODE	TIME	RESULT
3X	>	REPEAT
3X	>	1X
3X	>	2X

SMART SENSOR™ (2062R)

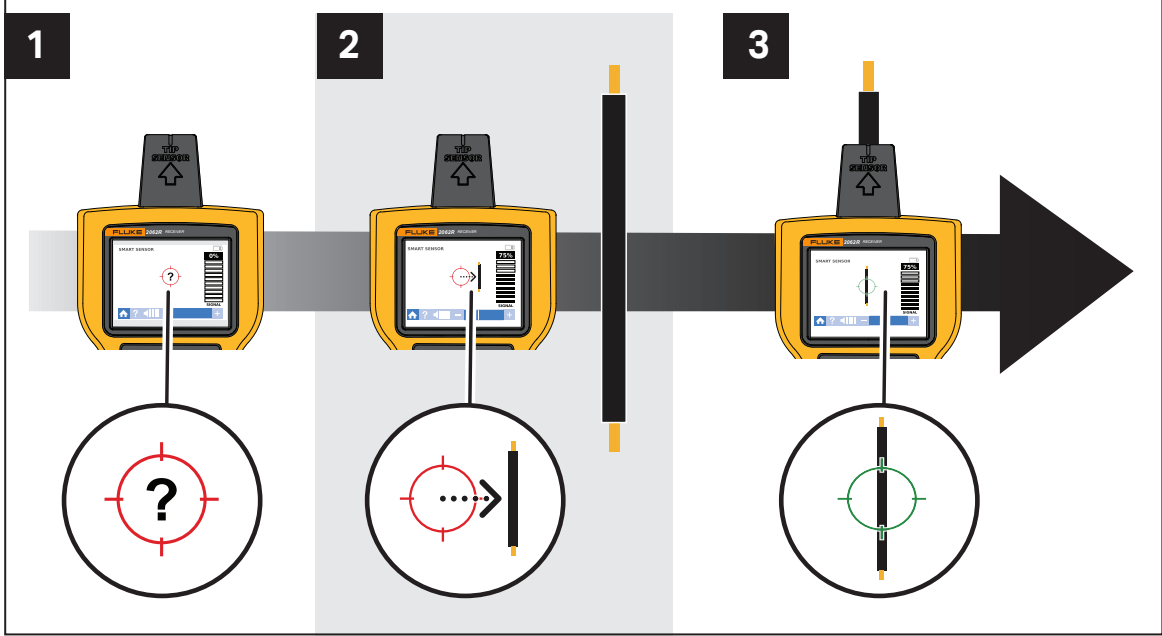

(2052R) / TIP SENSOR (2062R)

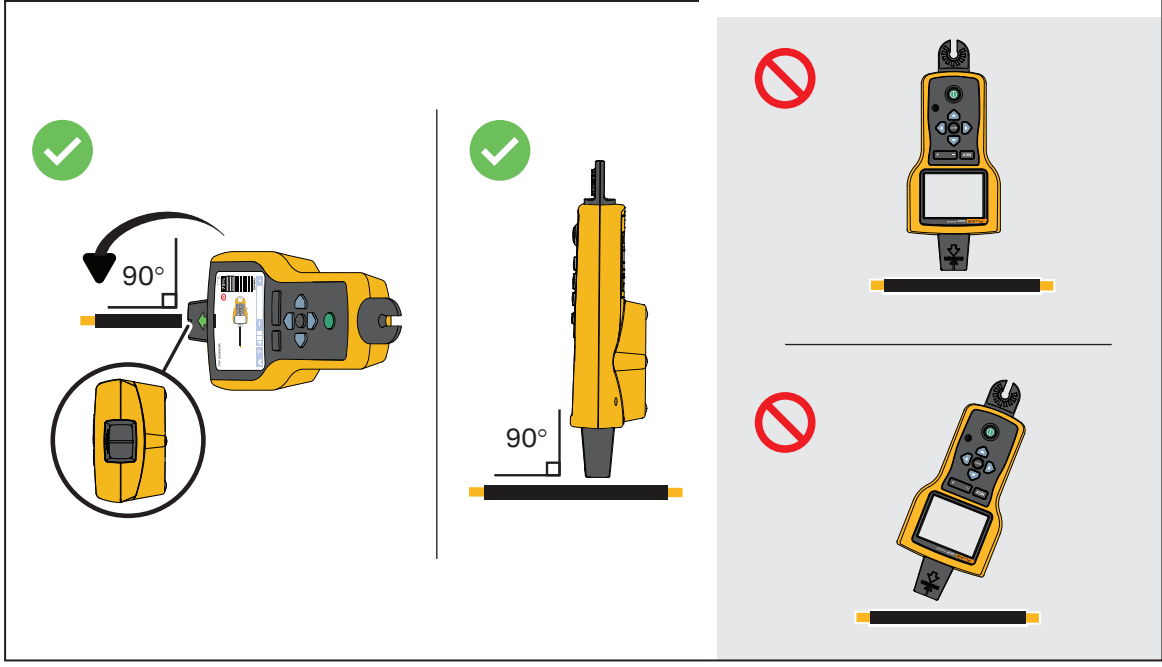

(2052R) / BREAKER (2062R)

