


Optimise design and performance of
pneumatic systems.




AVENTICS™ Series 651, 652, 653

High flow rates and broad range of Air Preparation systems
enable easier selection, design and system optimisation.

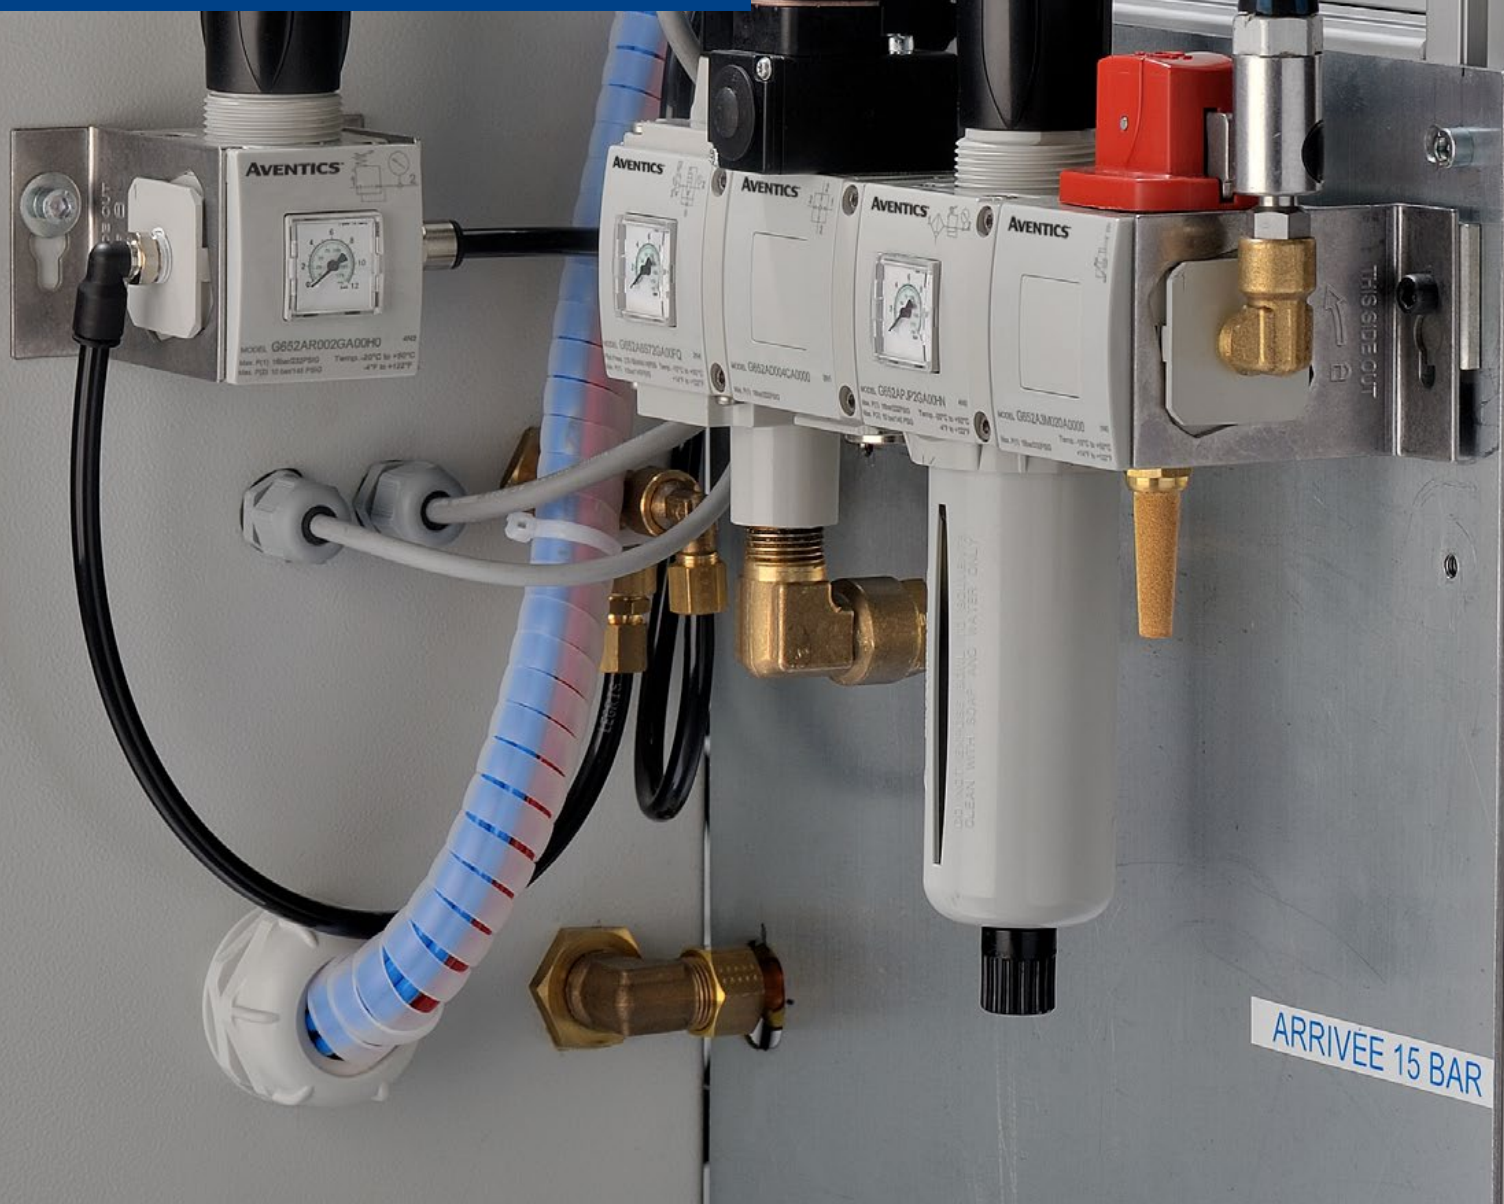


AVENTICS Series 651, 652, 653 aluminium air preparation

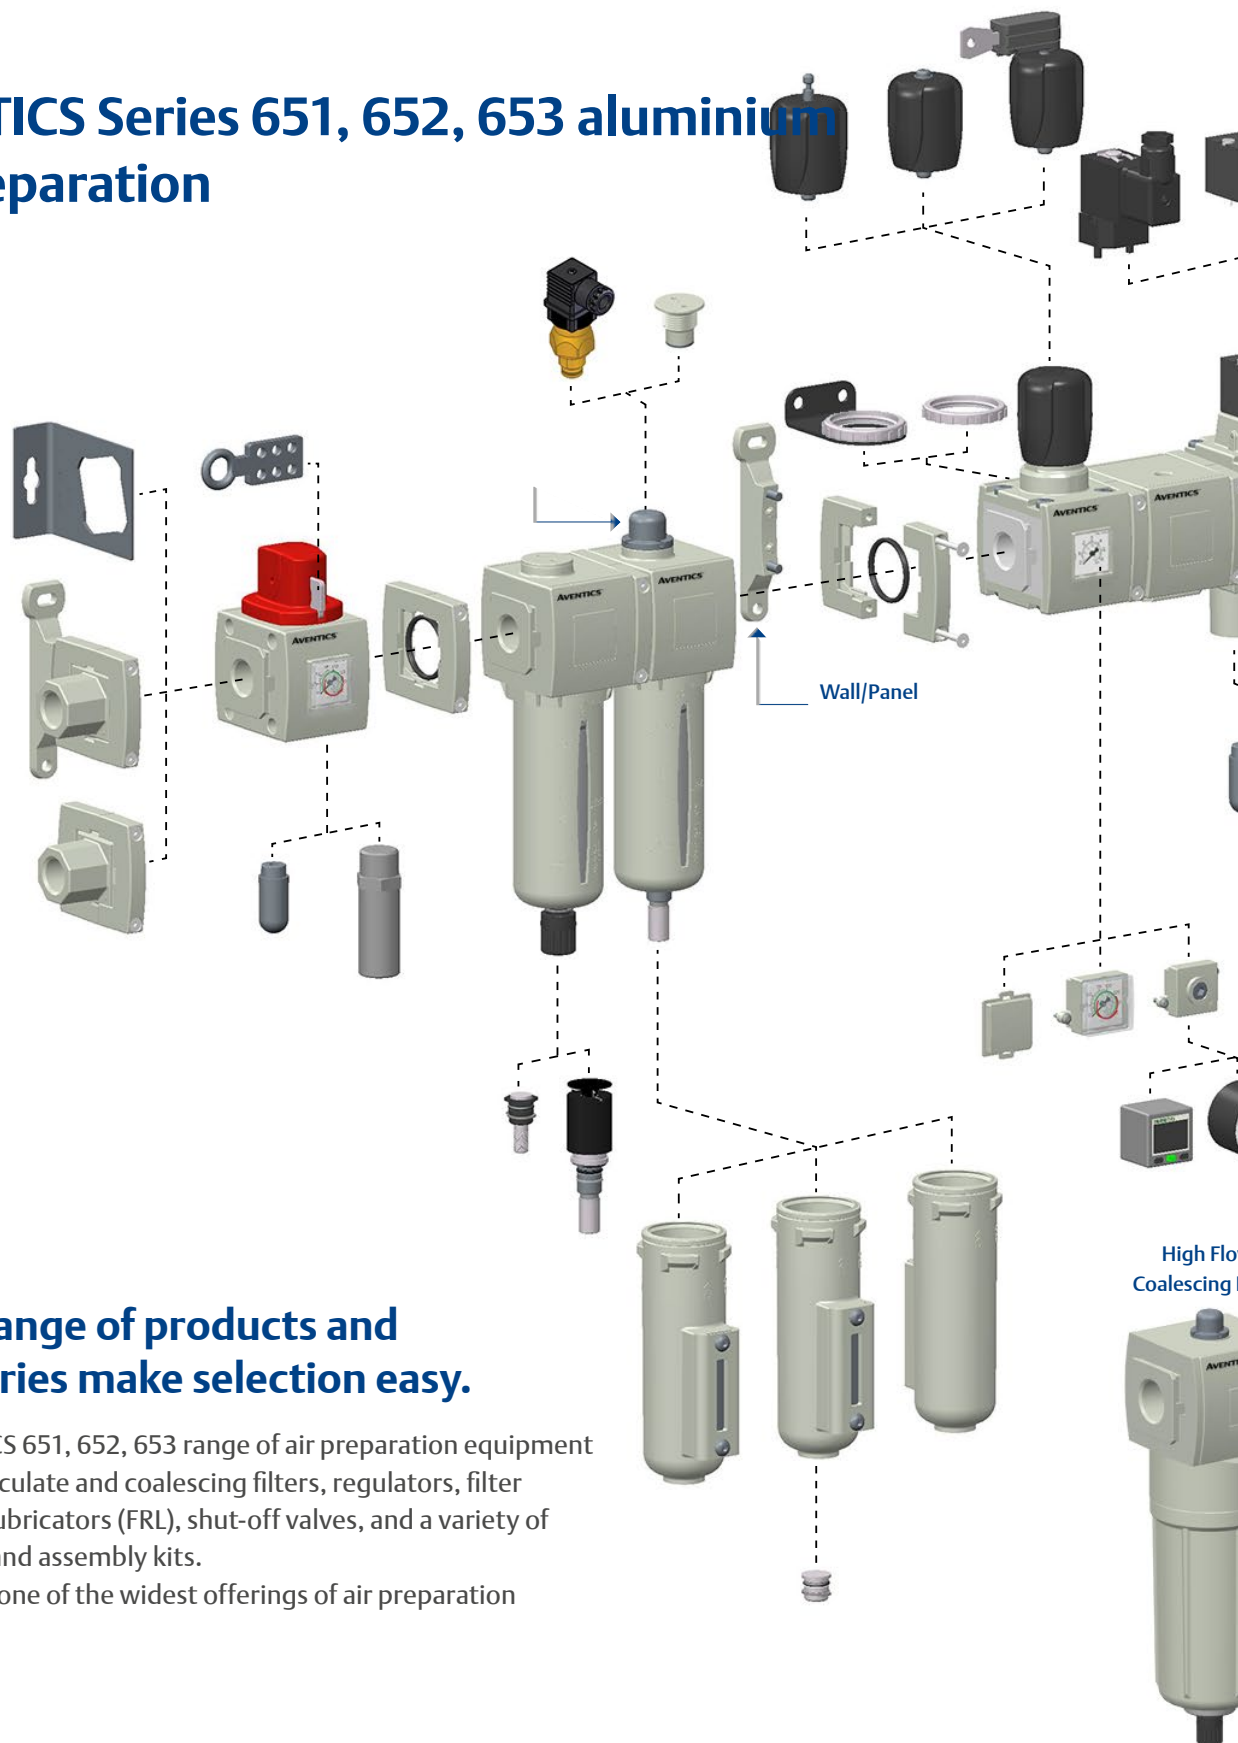

Broad range of products and accessories make selection easy.

The AVENTICS 651, 652, 653 range of air preparation equipment include particulate and coalescing filters, regulators, filter regulators, lubricators (FRL), shut-off valves, and a variety of accessories and assembly kits.

The range is one of the widest offerings of air preparation

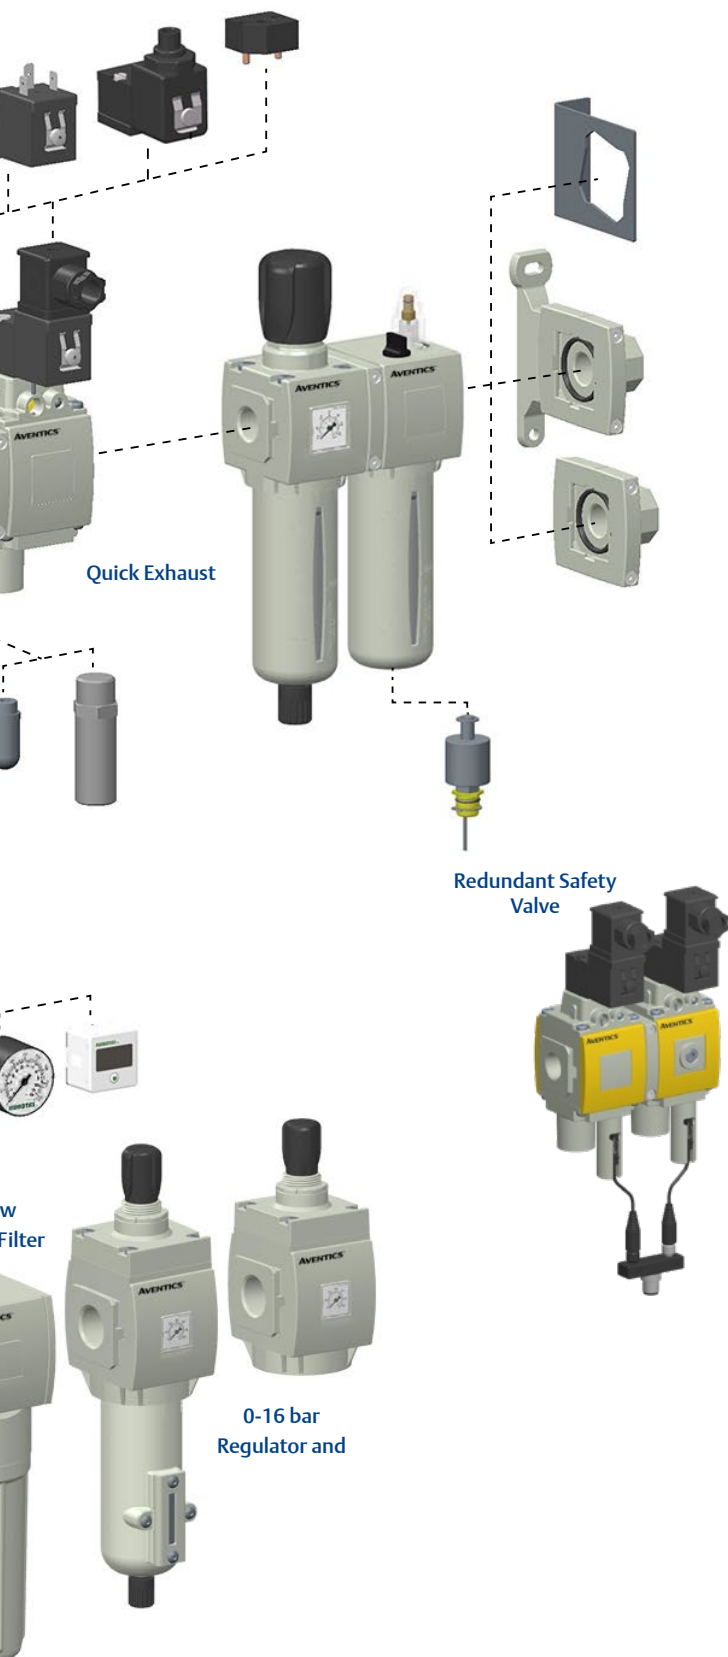

Port sizes	1/8, 1/4, 3/8, 1/2, 3/4, 1"
Maximum flow	Up to 10 000 l/min
Operating temperature	-20 to +50°C (-40 to +80°C optional)
Regulated pressure	0.2 to 10 bar (16 bar optional)
Fluid	Air or inert gas
Certifications	ATEX, CUTR
Standards	Complies to ISO 8573.1:2010 and ISO 12500 air purity classification



Same day shipping guaranteed
on orders placed before 12pm



Shipping guaranteed within 5 days

Particulate Filter



SERIES			651		652			653	
Filter Element	Bowls	Drain Type	1/8"	1/4"	1/4"	3/8"	1/2"	3/4"	1"
Flow (l/min)			920	1410	2250	3390	3700	4700	5000
25 Micron	Polycarbonate	Semi-Auto/Manual	G651ABJP1JA000N	G651ABJP2JA000N	G652ABJP2JA000N	G652ABJP3JA000N	G652ABJP4JA000N	G653ABJP5JA000N	G653ABJP6JA000N
		Automatic	G651ABJP1JA000A	G651ABJP2JA000A	G652ABJP2JA000A	G652ABJP3JA000A	G652ABJP4JA000A	G653ABJP5JA000A	G653ABJP6JA000A
	Metal without Sight Gauge	Semi-Auto/Manual	G651ABJK1JA000N	G651ABJK2JA000N	G652ABJK2JA000N	G652ABJK3JA000N	G652ABJK4JA000N	G653ABJK5JA000N	G653ABJK6JA000N
		Automatic	G651ABJK1JA000A	G651ABJK2JA000A	G652ABJK2JA000A	G652ABJK3JA000A	G652ABJK4JA000A	G653ABJK5JA000A	G653ABJK6JA000A
	Metal with Glass Sight Gauge	Semi-Auto/Manual	G651ABJL1JA000N	G651ABJL2JA000N	G652ABJL2JA000N	G652ABJL3JA000N	G652ABJL4JA000N	G653ABJL5JA000N	G653ABJL6JA000N
		Automatic	G651ABJL1JA000A	G651ABJL2JA000A	G652ABJL2JA000A	G652ABJL3JA000A	G652ABJL4JA000A	G653ABJL5JA000A	G653ABJL6JA000A
Flow (l/min)			885	1250	2020	2190	2290	4000	4250
5 Micron	Polycarbonate	Semi-Auto/Manual	G651ABBP1JA000N	G651ABBP2JA000N	G652ABBP2JA000N	G652ABBP3JA000N	G652ABBP4JA000N	G653ABBP5JA000N	G653ABBP6JA000N
		Automatic	G651ABBP1JA000A	G651ABBP2JA000A	G652ABBP2JA000A	G652ABBP3JA000A	G652ABBP4JA000A	G653ABBP5JA000A	G653ABBP6JA000A
	Metal without Sight Gauge	Semi-Auto/Manual	G651ABBK1JA000N	G651ABBK2JA000N	G652ABBK2JA000N	G652ABBK3JA000N	G652ABBK4JA000N	G653ABBK5JA000N	G653ABBK6JA000N
		Automatic	G651ABBK1JA000A	G651ABBK2JA000A	G652ABBK2JA000A	G652ABBK3JA000A	G652ABBK4JA000A	G653ABBK5JA000A	G653ABBK6JA000A
	Metal with Glass Sight Gauge	Semi-Auto/Manual	G651ABBL1JA000N	G651ABBL2JA000N	G652ABBL2JA000N	G652ABBL3JA000N	G652ABBL4JA000N	G653ABBL5JA000N	G653ABBL6JA000A
		Automatic	G651ABBL1JA000A	G651ABBL2JA000A	G652ABBL2JA000A	G652ABBL3JA000A	G652ABBL4JA000A	G653ABBL5JA000A	G653ABBL6JA000A

Regulator



SERIES			651		652			653	
Regulation Zone	Gauge		1/8"	1/4"	1/4"	3/8"	1/2"	3/4"	1"
Flow (l/min)			800	2060	4120	6530	7000	9000	11500
0-10 Bar	Flat Gauge		G651AR001GA00H0	G651AR002GA00H0	G652AR002GA00H0	G652AR003GA00H0	G652AR004GA00H0	G653AR005GA00H0	G653AR006GA00H0
	Port Plate RC 1/8		G651AR001PA00H0	G651AR002PA00H0	G652AR002PA00H0	G652AR003PA00H0	G652AR004PA00H0	G653AR005PA00H0	G653AR006PA00H0
	Round Gauge		G651AR001QA00H0	G651AR002QA00H0	G652AR002QA00H0	G652AR003QA00H0	G652AR004QA00H0	G653AR005QA00H0	G653AR006QA00H0
0-16 BAR	Flat Gauge							G653AR005GA00N0	G653AR006GA00N0
	Port Plate RC 1/8							G653AR005PA00N0	G653AR006PA00N0
	Round Gauge							G653AR005QA00N0	G653AR006QA00N0

Particulate Filter-Regulator



SERIES					651		652			653				
Regulation	Gauge	Filter	Bowls	Drain Type	1/8"	1/4"	1/4"	3/8"	1/2"	3/4"	1"			
Flow (l/min)					730	2360	4120	5420	5500	9000	10000			
0-10 BAR	Flat Gauge	25 Micron	Polycarbonate	Semi-Auto	G651APJP1GA00HN	G651APJP2GA00HN	G652APJP2GA00HN	G652APJP3GA00HN	G652APJP4GA00HN	G653APJP5GA00HN	G653APJP6GA00HN			
				Automatic	G651APJP1GA00HA	G651APJP2GA00HA	G652APJP2GA00HA	G652APJP3GA00HA	G652APJP4GA00HA	G653APJP5GA00HA	G653APJP6GA00HA			
			Metal without Sight Gauge	Semi-Auto	G651APJK1GA00HN	G651APJK2GA00HN	G652APJK2GA00HN	G652APJK3GA00HN	G652APJK4GA00HN	G653APJK5GA00HN	G653APJK6GA00HN			
				Automatic	G651APJK1GA00HA	G651APJK2GA00HA	G652APJK2GA00HA	G652APJK3GA00HA	G652APJK4GA00HA	G653APJK5GA00HA	G653APJK6GA00HA			
			Metal with Glass Sight Gauge	Semi-Auto	G651APJL1GA00HN	G651APJL2GA00HN	G652APJL2GA00HN	G652APJL3GA00HN	G652APJL4GA00HN	G653APJL5GA00HN	G653APJL6GA00HN			
				Automatic	G651APJL1GA00HA	G651APJL2GA00HA	G652APJL2GA00HA	G652APJL3GA00HA	G652APJL4GA00HA	G653APJL5GA00HA	G653APJL6GA00HA			
			Flow (l/min)					710	2240	3800	4450	4490	8900	9000
			0-10 BAR	Flat Gauge	5 Micron	Polycarbonate	Semi-Auto	G651APBP1GA00HN	G651APBP2GA00HN	G652APBP2GA00HN	G652APBP3GA00HN	G652APBP4GA00HN	G653APBP5GA00HN	G653APBP6GA00HN
Automatic	G651APBP1GA00HA	G651APBP2GA00HA					G652APBP2GA00HA	G652APBP3GA00HA	G652APBP4GA00HA	G653APBP5GA00HA	G653APBP6GA00HA			
Metal without Sight Gauge	Semi-Auto	G651APBK1GA00HN				G651APBK2GA00HN	G652APBK2GA00HN	G652APBK3GA00HN	G652APBK4GA00HN	G653APBK5GA00HN	G653APBK6GA00HN			
	Automatic	G651APBK1GA00HA				G651APBK2GA00HA	G652APBK2GA00HA	G652APBK3GA00HA	G652APBK4GA00HA	G653APBK5GA00HA	G653APBK6GA00HA			
Metal with Glass Sight Gauge	Semi-Auto	G651APBL1GA00HN				G651APBL2GA00HN	G652APBL2GA00HN	G652APBL3GA00HN	G652APBL4GA00HN	G653APBL5GA00HN	G653APBL6GA00HN			
	Automatic	G651APBL1GA00HA				G651APBL2GA00HA	G652APBL2GA00HA	G652APBL3GA00HA	G652APBL4GA00HA	G653APBL5GA00HA	G653APBL6GA00HA			
0-16 BAR	Integrated Flat Gauge	25 Micron				Metal without Sight Gauge	Flow (l/min)					9000	10000	
							Semi-Auto						G653APJK5GA00NN	G653APJK6GA00NN
			Metal with Glass Sight Gauge	Semi-Auto						G653APJL5GA00NN	G653APJL6GA00NN			
				Flow (l/min)					8900	9000				
0-16 BAR	Integrated Flat Gauge	5 Micron	Metal without Sight Gauge	Semi-Auto					G653APBK5GA00NN	G653APBK6GA00NN				
				Semi-Auto					G653APBL5GA00NN	G653APBL6GA00NN				



Lubricator

SERIES	651		652			653	
Bowls	1/8"	1/4"	1/4"	3/8"	1/2"	3/4"	1"
Flow (l/min)	900	1940	2780	5000	5100	13000	13000
Polycarbonate	G651AL0P10A0000	G651AL0P20A0000	G652AL0P20A0000	G652AL0P30A0000	G652AL0P40A0000	G653AL0P50A0000	G653AL0P60A0000
Metal without Sight Gauge	G651AL0K10A0000	G651AL0K20A0000	G652AL0K20A0000	G652AL0K30A0000	G652AL0K40A0000	G653AL0K50A0000	G653AL0K60A0000
Metal with Glass Sight Gauge	G651AL0L10A0000	G651AL0L20A0000	G652AL0L20A0000	G652AL0L30A0000	G652AL0L40A0000	G653AL0L50A0000	G653AL0L60A0000



3/2 Shut-Off Valve

SERIES	651		652			653	
Bowls	1/8"	1/4"	1/4"	3/8"	1/2"	3/4"	1"
Flow (l/min)	1440	4720	4300	8800	11400	13300	13300
Without Option	G651A3M010A0000	G651A3M020A0000	G652A3M020A0000	G652A3M030A0000	G652A3M040A0000	G653A3M050A0000	G653A3M060A0000
With Metal Muffler	G651A3M01011100	G651A3M02011100	G652A3M02011100	G652A3M03011100	G652A3M04011100	G653A3M05011100	G653A3M06011100
With Polyethylene Muffler	G651A3M01011200	G651A3M02011200	G652A3M02011200	G652A3M03011200	G652A3M04011200	G653A3M05011200	G653A3M06011200



Diverter Block

651	652	653
1/4"	1/2"	1"
G651AD002CA0000	G652AD004CA0000	G653AD006CA0000



	0,2 - 6 bar	0,5 - 10 bar	0,5 - 16 bar
With Protection	34900028	34900031	34900034
Without Protection	34900027	34900030	34900033

Slow-Start / Quick Exhaust

SERIES		651		652			653	
Product Type	Pilot Type	1/8"	1/4"	1/4"	3/8"	1/2"	3/4"	1"
Flow (l/min)		780	1000	1500	3750	4650	7280	8230
2/2 SLOW START	Air Piloted Internal	G651A4P010A0000	G651A4P020A0000	G652A4P020A0000	G652A4P030A0000	G652A4P040A0000	G653A4P050A0000	G653A4P060A0000
	Solenoid Pilot Operated	G651A4S910A0000	G651A4S920A0000	G652A4S920A0000	G652A4S930A0000	G652A4S940A0000	G653A4S950A0000	G653A4S960A0000
3/2 QUICK EXHAUST	Solenoid Pilot Operated	G651A5S910A0000	G651A5S920A0000	G652A5S920A0000	G652A5S930A0000	G652A5S940A0000	G653A5S950A0000	G653A5S960A0000
3/2 SLOW-START/ QUICK EXHAUST	Solenoid Pilot Operated	G651A6S910A0000	G651A6S920A0000	G652A6S920A0000	G652A6S930A0000	G652A6S940A0000	G653A6S950A0000	G653A6S960A0000



Pilot For Slow-Start / Quick Exhaust

SERIES	Pilot Series	Pilot Type	Code	Coil	Code	Connector Type	Coil	Code
651 652	189	Without Manual Operator	1899007	24 V AC 50/60 Hz	43004416	6-8 mm	Without LED	88122404
				115 V AC 50/60 Hz	43004419	6-8 mm	With LED	24V 50/60 Hz 24V DC 88122405
				230 V AC 50/60 Hz	43004422	6-8 mm		115 50 Hz 88122407
				24 V DC	43004166	6-8 mm		230 50/60 Hz 88122410
	190	Without Manual Operator	19090005	24 V AC 50/60 Hz	43004469	6-10 mm	Without LED	88122602
				115 V AC 50/60 Hz	43004471	6-10 mm	With LED	24V 50/60 Hz 24V DC 88122603
				230 V AC 50/60 Hz	43004472	6-10 mm		115 50 Hz 88122605
		Impulse	19090017	24 V DC	43004473	6-10 mm		230 50/60 Hz 88122608
653	192	Without Manual Operator	19291010	24 V AC 50/60 Hz	43005604	6-10 mm	Without LED	88122602
				115 V AC 50/60 Hz	43005617	6-10 mm	With LED	24V 50/60 Hz 24V DC 88122603
				230 V AC 50/60 Hz	43005627	6-10 mm		115 50 Hz 88122605
		Impulse	19291012	24 V DC	43005642	6-10 mm		230 50/60 Hz 88122608



For further information on these products, visit www.Emerson.com/AVENTICS

Mountings

	Description	Series	Code
	Body-to-Body Assembly Clamps with NBR Seals	651	P651AT504958001
		652	P652AT502466001
		653	P653AT507291001
	Wall/Panel Bracket Kit	651 652 653	P699AT502467001
	Side Mounting Brackets	651	P651AT503860001
		652	P652AT503860002
		653	P653AT503860003
	Panel Nut for Regulator and Filter-Regulator	651	P651AT513928001
		652	P652AT513177001
	Panel nut & Bracket for Regulator and Filter-Regulator	651	P651AT503861001
		652	P652AT503861002
	End Plate Kit G1/4 (651) G1/2 (652) and G1 (653)	651	T651AT504959002
		652	T652AT502468002
		653	T653AT507292002

Accessories and Spare Parts

	Description	Product	Series	Series	Code
	Metal Muffler	Shut-off	G1/4	651	M2MB
		Quick exhaust	G1/4		
	Polyethylene Muffler	Shut-off	G1/4	652	34600407
		Quick exhaust	G1/4		
	Metal Muffler	Shut-off	G1/4	653	M2MB
		Quick exhaust	G1/2		M4MB
	Polyethylene Muffler	Shut-off	G1/4	653	34600407
		Quick exhaust	G1/2		34600409
	Metal Muffler	Shut-off	G3/8	653	M3MB
		Quick exhaust	G1		M6MB
	Polyethylene Muffler	Shut-off	G3/8	653	34600408

	Description	Series	Code
	Round Manometer Adapter Port Plate RC1/8	651 652 653	M699AG440510002
	Pressure Range indicator Red/Green for Integrated Flat Gauge	651 652 653	M699AG500179001
	Integrated Gauge - 651/652/653 Series: 0-12 bar Scale with NBR Seals	651 652 653	M699AG438047001
	Round Gauge - 0-4 bar 1/8 ISO 7/1 Rc and 40mm Face Diameter	651 652 653	34300015
	Round Gauge - 0-10 bar 1/8 ISO 7/1 Rc and 40mm Face Diameter		34300014
	Round Gauge - 0-12 bar 1/8 ISO 7/1 Rc and 40mm Face Diameter		34300041
	Round Gauge - 0-25 bar 1/8 ISO 7/1 Rc and 50mm Face Diameter		34200063
	Round Gauge - 0-4 bar 1/8 ISO 7/1 Rc and 50mm Face Diameter		34200061
	Round Gauge - 0-12 bar 1/8 ISO 7/1 Rc and 50mm Face Diameter		34200062
	Round Gauge - 0-16 bar 1/8 ISO 7/1 Rc and 50mm Face Diameter		34200997
	Key Lock Device	651 652 653	M699AY438663001
	Digital Pressure Switch PNP M8 with Cable 1/8 ISO 7/1 RC	651 652 653	DPS280PRQ8
	Bowl and Drain Assembly - Includes Polycarbonate Bowl/Guard and Semi-Automatic Drain Assembly (NBR Seals)	651	M651AU514009001
		652	M652AU513311001
		653	M653AU14103001

651, 652, 653 Series Quick Assemblies



Filter-Regulator + Lubricator

- 25µ filter element
- Integrated Manometer
- Polycarbonate Bowl
- 0-10 Bar Regulation Zone
- Semi-Automatic/Manual Drain

Series	Port Size	Code
651	1/8"	A651A0000000400
	1/4"	A651A0000000401
652	1/4"	A652A0000000001
	3/8"	A652A0000000002
	1/2"	A652A0000000003
653	3/4"	A653A0000000600
	1"	A653A0000000601



3/2 Shut-Off + Filter-Regulator

- 25µ filter element
- Integrated Manometer
- Polycarbonate Bowl
- 0-10 Bar Regulation Zone
- Semi-Automatic/Manual Drain

Series	Port Size	Code
651	1/8"	A651A0000003632
	1/4"	A651A0000002493
652	1/4"	A652A0000003637
	3/8"	A652A0000003638
	1/2"	A652A0000001048
653	3/4"	A653A0000000696
	1"	A653A0000000697



3/2 Shut-Off + Filter-Regulator + Lubricator

- 25µ filter element
- Integrated Manometer
- Polycarbonate Bowl
- 0-10 Bar Regulation Zone

Series	Port Size	Code
651	1/8"	A651A0000003390
	1/4"	A651A0000003391
652	1/4"	A652A0000003392
	3/8"	A652A0000003393
	1/2"	A652A0000002941
653	3/4"	A653A0000000698
	1"	A653A0000000699



3/2 Shut-Off + Filter-Regulator + 3/2 Slow-Start/Quick-Exhaust

- 25µ filter element
- Integrated Manometer
- Polycarbonate Bowl
- 0-10 Bar Regulation Zone
- Semi-Automatic/Manual Drain

Series	Port Size	Code
651	1/8"	A651A0000003633
	1/4"	A651A0000003634
652	1/4"	A652A0000003639
	3/8"	A652A0000003640
	1/2"	A652A0000003641
653	3/4"	A653A0000000700
	1"	A653A0000000701



3/2 Shut-Off + Filter-Regulator + 3/2 Slow-Start


- 25µ filter element
- Integrated Manometer
- Polycarbonate Bowl
- 0-10 Bar Regulation Zone
- Semi-Automatic/Manual Drain

Series	Port Size	Code
651	1/8"	A651A0000003635
	1/4"	A651A0000003636
652	1/4"	A652A0000003642
	3/8"	A652A0000003643
	1/2"	A652A0000003644
653	3/4"	A653A0000000702
	1"	A653A0000000703



For further information on these products, visit www.Emerson.com/AVENTICS

**You can choose from one of the most complete
air preparation product range in the market and
only have to work with one supplier.**

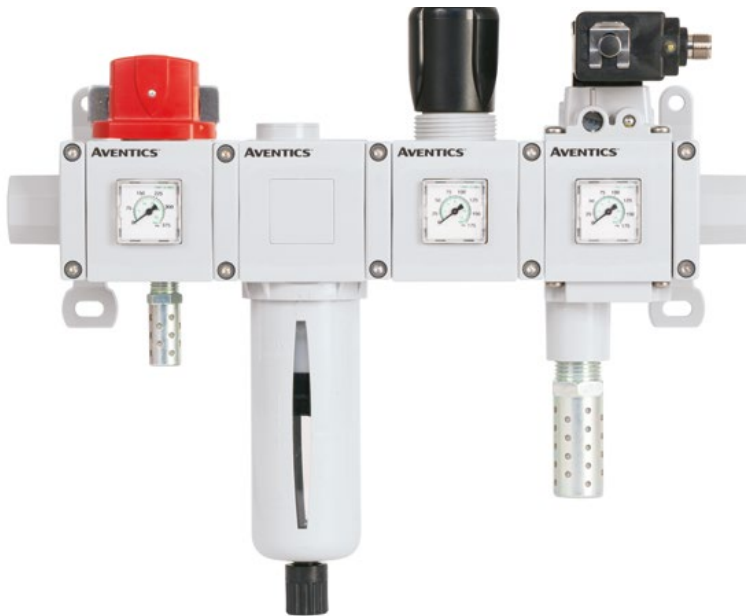

AVENTICS™

Where flow control meets pneumatics to create fluid automation solutions that maximise efficiencies, optimise applications, and enable customers to fulfil their true potential.

Our extensive product lines include a broad range of solenoid valves, pressure operated valves, pneumatic valves, valve

Visit us: [Emerson.com/aventics](https://emerson.com/aventics)

Your local contact: [Emerson.com/contact](https://emerson.com/contact)



[Emerson.com](https://emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-](https://linkedin.com/company/Emerson-Automation-Solutions)



[Solutions](https://linkedin.com/company/Emerson-Automation-Solutions)

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2021 Emerson Electric Co. All rights reserved.
BR000035ENG8-02_04-21



EMERSON™

CONSIDER IT SOLVED™