

2100 and 2200 Benchtop Temperature Controllers



Key features

- Most stable temperature controllers available
- Resolution as high as 0.00018°C
- RS-232 interface included for automating applications

Product overview: 2100 and 2200 Benchtop Temperature Controllers

2100 and 2200 Benchtop Controllers

- Most stable temperature controllers available
- Resolution as high as 0.00018°C
- RS-232 interface included for automating applications

It's no secret why Fluke Calibration's temperature baths are the most stable baths in the world. If you're using a homemade bath there's a good chance you can drastically improve its performance by using one of Fluke Calibration's two temperature controllers.

The 2100 controller can sense and respond to temperature changes as low as 0.00001 °C, which means you can enjoy stabilities better than ± 0.001 °C in a mechanically sound bath.

The 2100 has set-point resolution of 0.002 °C using a thermistor input and 0.01 °C using an RTD input. In high-resolution mode you can adjust the set-point in increments smaller than 0.0002 °C. Actual display resolution is 0.01 °C.

Power output is provided on a standard IEC female power receptacle. An auxiliary power output provides constant line voltage to equipment accessories such as stirrers. The 2200 controller is smaller and lighter than the 2100 and uses an RTD input to provide stabilities as good as ± 0.015 °C. Resolution is 0.01 °C and temperature range is -100 °C to 800 °C.

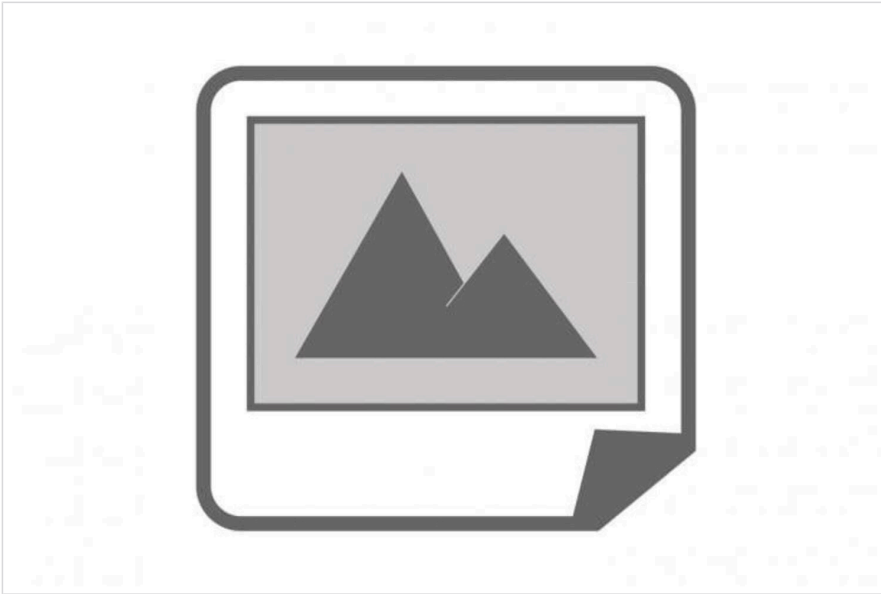
If operated from any line power between 100 and 230 V ac, 50 or 60 Hz, the 2200 will supply up to 10 amps power output on a standard IEC female power receptacle. Both models are programmed using the front-panel buttons and also come with an RS-232 interface.

Either of these benchtop controllers can turn an average temperature bath into a true calibration tool.

Specifications: 2100 and 2200 Benchtop Temperature Controllers

Specifications	
Temperature range	2100: -100 °C to 670 °C 2200: -100 °C to 800 °C
Control stability	2100: ± 0.0005 °C to ± 0.002 °C 2200: ± 0.005 °C to ± 0.02 °C (depends on system design)
Display accuracy (with probes shown below)	± 1.0 °C without system calibration
Display resolution	0.01 °
Set-point resolution	2100: 0.0002 ° in high-resolution mode 2200: 0.01 °
Auxiliary and heater output	2100: 100–125 nominal VAC or 230 nominal VAC (internally switchable), 50/60 Hz, 10 A max. 2200: 100–230 VAC, 50/60 Hz, 10 A max.
Heater output	Solid-state relay
Dimensions (H x W x D)	2100: 72 x 172 x 250 mm (2.83 x 6.75 x 9.86 in) 2200: 72 x 114 x 178 mm (2.85 x 4.5 x 7 in)
Probes	2620: RTD, 280 x 4.8 mm (11 x 0.187 in), -100 to 550 °C 2622: RTD, 229 x 4.8 mm (9 x 0.187 in), -100 to 550 °C 2624: RTD, 356 x 4.8 mm (14 x 0.187 in), -100 to 550 °C 2611: Thermistor, 229 x 5.5 mm (9 x 0.218 in), -10 °C to 110 °C (2100 controller only)

Ordering information

**2100-P**

Controller, PRT

Part#: 0

2100-T

Controller, Thermistor

Part#: 0

2200

Controller, PRT

Part#: 0

2125

IEEE-488 Interface, 2100

Part#: 1650048

Fluke. *Keeping your world up and running.®*

Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:
In the U.S.A. (800) 443-5853
In Canada (800) 36-FLUKE
From other countries +1 (425) 446-5500
www.fluke.com

©2026 Fluke Corporation.
Specifications subject to change without notice.
04/2026

**Modification of this document is not permitted
without written permission from Fluke
Corporation.**